



## **UK General Catalogue**

# CONTENTS

<b>BALANCES</b> .....	3
<b>ECLIPSE®</b> ANALYTICAL AND PRECISION BALANCES .....	4
<b>NIMBUS®</b> ANALYTICAL AND PRECISION BALANCES .....	6
<b>HIGHLAND®</b> PORTABLE PRECISION BALANCES.....	8
<b>CORE®</b> PORTABLE COMPACT BALANCES.....	9
<b>CB</b> COMPACT BALANCES.....	10
<b>DUNE®</b> PORTABLE COMPACT BALANCES .....	11
<b>TBB</b> TRIPLE-BEAM BALANCES .....	12
<b>MOISTURE ANALYSER</b> .....	13
<b>PMB</b> MOISTURE ANALYSER.....	14
<b>BENCH &amp; FLOOR WEIGHING SCALES</b> .....	15
<b>ASTRO®</b> Compact Scales .....	16
<b>LBK</b> WEIGHING SCALES.....	17
<b>CBK</b> BENCH CHECKWEIGHING SCALES.....	18
<b>CPWPLUS</b> WEIGHING SCALES.....	19
<b>GBK</b> BENCH CHECKWEIGHING SCALES.....	20
<b>ABK</b> BENCH WEIGHING SCALES .....	21
<b>GFK</b> FLOOR CHECKWEIGHING SCALES .....	22
<b>AFK</b> FLOOR WEIGHING SCALES.....	23
<b>COUNTING SCALES</b> .....	24
<b>CBC</b> BENCH COUNTING SCALES .....	25
<b>CBD</b> BENCH COUNTING SCALES.....	26
<b>GBC</b> BENCH COUNTING SCALES.....	27
<b>GFC</b> FLOOR COUNTING SCALES .....	28
<b>WASHDOWN SCALES</b> .....	29
<b>WARRIOR®</b> WASHDOWN SCALES .....	30
<b>WBW</b> WASHDOWN SCALES.....	31
<b>RETAIL SCALES</b> .....	32
<b>WBZ</b> WASHDOWN RETAIL SCALES.....	33
<b>AZEXTRA</b> PRICE-COMPUTING RETAIL SCALES.....	34
<b>RAVEN®</b> PRICE-COMPUTING RETAIL SCALES .....	35
<b>CCEU</b> COIN COUNTING SCALE .....	36
<b>CRANE SCALES</b> .....	37
<b>SHS</b> CRANE SCALES.....	38
<b>LHS</b> CRANE SCALES.....	39
<b>IHS</b> CRANE SCALES.....	40
<b>HEAVY DUTY SCALES</b> .....	41
<b>AELP</b> PALLET BEAMS .....	42
<b>PTM</b> DRUM AND WHEELCHAIR SCALE.....	43
<b>PT</b> PLATFORMS .....	44
<b>PTS</b> PALLET TRUCK SCALE .....	45
<b>INDICATORS</b> .....	46
<b>AE</b> INDICATORS.....	47
<b>GK &amp; GK-M</b> INDICATORS.....	48
<b>GC</b> COUNTING INDICATOR.....	49
<b>HEALTH AND FITNESS SCALES</b> .....	50
<b>MTB</b> BABY AND TODDLER SCALE.....	51
<b>MDW</b> PHYSICIAN SCALES.....	52
<b>MUW</b> MEDICAL SCALES.....	53
<b>MCW</b> CHAIR WEIGHING SCALE .....	54
<b>WEIGHTS &amp; SETS</b> .....	55
<b>OIML</b> WEIGHT SETS.....	56
<b>ACCESSORIES</b> .....	57



Adam Equipment manufactures balances and scales for laboratory, industrial, medical, retail, and education customers worldwide. Founded in the United Kingdom in 1972, Adam has strategically established a network of offices throughout the world to provide a high level of service to its customers everywhere. With facilities in the United Kingdom, United States, South Africa, Australia, Germany and China, Adam maintains a strong global presence.

From its beginnings, Adam has focused on delivering products with the right balance of speed, performance and value. Adam is committed to manufacturing reliable products with proven technology and user-friendly features. The company takes great pride in providing comprehensive, responsive support and assistance to every customer. Adam Equipment UK is ISO 9001-2008 and NMO accredited to certify balances and scales for trade use.

Adam's commitment to ongoing, customer-driven product development ensures that the company will continue to move forward, bringing customers the weighing solutions they need now and in the future.

## Icon:



External Calibration



IP66-Rated Waterproof



Internal Calibration



GLP/ISO Printouts



External Battery



Weigh-Below



Internal Rechargeable Battery



Security Devices



Time



Multiple Weighing Units



Date



Backlit Display



USB



Tare



RS-232 Port



Approved for Trade

Designed for advanced scientists and researchers, the Eclipse occupies minimal space on the laboratory work bench, yet maintains optimal performance. Its elegant capacitive touch keypad provides highly efficient operation and an increased lifespan of the balance. The smooth surface allows fingerprints and spills to be wiped off easily. Other standard features include solid metal housing, adjustable levelling feet, USB and RS-232 interfaces, and a large backlit LCD.

Nimbus analytical and precision balances offer the best in today's processing technology to deliver results with greater accuracy. Metal housing provides the durability to withstand chemicals, increasing longevity of the balance. With large navigation buttons and dual tare keys, the intuitive keypad is easy to use, so operation requires only minimal training.

Adam Equipment's Highland portable precision balance is well-suited for lab work, field use, classrooms or industrial applications. The Highland's ShockProtect® helps safeguard the balance against damage from overloads or shock loads. Adam's unique HandiCal® internal calibration provides the simplicity of calibrating with built-in mass, and the versatility to calibrate externally using certified masses for traceability.

Compact and durable, the Core is unbeatable for basic weighing tasks. Core's sturdy housing is easy to clean and protects against spills. A basic keypad with dual tare keys makes operation simple. Complete with built-in overload protection, removable draught shield, AC adapter and integrated security slot, the Core provides outstanding value.

The CB compact scale boasts best-in-class performance and value. Its stainless steel pan is easy to clean, while the CB's one-piece housing and sealed keypad help protect internal components from dirt and spills. Overload protection helps prevent damage from excess weight. CB's compact size makes it easy to transport and store. A built-in battery allows operation anywhere, while auto power-off conserves battery life.

The Dune offers all the features needed for quick, reliable weighing in the lab or in the field. Its low-profile design is user-friendly, enabling fast setup and uncomplicated operation using just three buttons: on/off, unit, and tare. The Dune is equipped with a large pan and splashproof keypad to allow easy cleaning. Weighing results are provided in grams, ounces, or pounds.

Sturdy metal housing and a grade 304 stainless steel weighing pan make TBB ideal for classroom use. With a larger body than other triple-beam balances, TBB features innovative tripod legs and an integrated weigh-below hook, simplifying density and specific gravity determination. A security slot for optional Kensington-type lock and cable help deter theft.

## Featured Product: Nimbus Balance





## FEATURES

- Vivid, backlit LCD easily visible in any lighting conditions
- Capacity tracker built into display for easily monitoring possible overloads
- Programmable backlight can be set to “always on,” “always off” or “light only when weighing”
- Large, grade 304 stainless steel pan allows easy cleaning
- Overload protection helps prevent damage to internal components
- Removable draught shield on models with 0.001g readability helps to reduce errors caused by air currents
- Robust metal housing protects internal components in harsh environments
- Sealed keypad protects against dirt and spills
- USB and RS-232 interfaces provide speedy communication with computers and printers
- Level indicator and adjustable feet ensure proper balance setup for optimum weighing results
- The illuminated capacitive touch keypad provides responsive operation, and its durable, smooth surface can be easily wiped down
- External calibration allows for verification and adjustment with weights
- Multilingual display allows use in many different countries
- Printouts include date and time for data tracking within Good Laboratory Practices (GLP) guidelines
- Security password control prevents unauthorised access
- Selectable digital filtering for animal/dynamic weighing delivers stable results for moving subjects
- AC adapter included

## Fully featured series – our most intuitive balance to date

### GENERAL SPECIFICATIONS

- Weighing units: g, kg, mg, lb, ct, GN, dr, oz, ozt, dwt, mm, tl.T, tl.H, tl.S, ti, T, custom unit
- Interface: RS-232, USB
- Power Supply: 18VDC 50/60Hz 830mA adapter
- Display: Backlit LCD with capacity tracker with 24mm-high digits
- Calibration: External / Internal calibration
- Housing: Die-cast aluminum
- Operating Temperature: 15° to 35°C

### APPLICATIONS

- Weighing
- Parts counting
- Percentage weighing
- Checkweighing
- Check counting
- Dynamic / animal weighing
- Density determination

### WEIGHTS AND DIMENSIONS (Internal Calibration same as External Calibration)

- **EBL 104e, 164e, 214e, 254e, 314e:**  
Net Weight - 5.5kg, Overall Dim. - 220x340x344mm (wxdxh)
- **EBL 223e, 423e, 623e, 823e, 1023e, 1623e:**  
Net Weight - 4.5kg, Overall Dim. - 220x310x270mm (wxdxh)
- **EBL 1602e, 2602e, 3602e, 4602e, 6202e, 4201e, 6201e, 8201e:**  
Net Weight - 4.5kg, Overall Dim. - 220x310x89mm (wxdxh)
- **EBL 12001e, 16001e, 22001e, 32001e:**  
Net Weight - 7.3kg, Overall Dim. - 401x460x102mm (wxdxh)
- **EBL 12001P, 16001P, 22001P, 32001P (Pillar Attachment):**  
Net Weight - 7.5kg, Overall Dim. - 401x500x600mm (wxdxh)

### ACCESSORIES

Item number	Description
<b>104008036</b>	Anti-vibration table
1060012713	Density kit for 90mm ø
<b>1060012714</b>	Density kit for 120mm ø and 160mm ø pan
3012313007	Dust cover for 0.1mg balances
3012313008	Dust cover for 0.01g and 0.001g
<b>1120011156</b>	ATP thermal printer
3126011263	ATP thermal printer paper
3126011281	ATP thermal printer paper (pack of 10)
3014011014	RS-232 cable
600002028	Adam DU data collection program
3074010267	USB cable
302126013	Weigh-below hook for 400x300mm pan
3014013041	Security cable
700660290	Calibration certificate

Item number	Description
700100207	E2 1g to 200g calibration weight set
700100232	E2 50g calibration weight
700100022	E2 100g calibration weight
700100023	E2 200g calibration weight
700100007	F1 100g calibration weight
700100012	F1 200g calibration weight
700100008	F1 500g calibration weight
700100009	F1 1kg calibration weight
700100010	F1 2kg calibration weight
700100013	F1 5kg calibration weight
700100209	2 x F1 5kg calibration weights



104008036



1120011156



1060012714

## External Calibration

Model	Capacity	Readability	Pan Size
EBL 104e	100g	0.0001g	90mm ø
EBL 164e	160g	0.0001g	90mm ø
EBL 214e	210g	0.0001g	90mm ø
EBL 254e	250g	0.0001g	90mm ø
EBL 314e	310g	0.0001g	90mm ø
EBL 223e	220g	0.001g	120mm ø
EBL 423e	420g	0.001g	120mm ø
EBL 623e	620g	0.001g	160mm ø
EBL 823e	820g	0.001g	160mm ø
EBL 1023e	1020g	0.001g	160mm ø
EBL 1623e	1620g	0.001g	160mm ø
EBL 1602e	1600g	0.01g	160mm ø
EBL 2602e	2600g	0.01g	160mm ø
EBL 3602e	3600g	0.01g	160mm ø
EBL 4602e	4600g	0.01g	160mm ø
EBL 6202e	6200g	0.01g	160mm ø
EBL 4201e	4200g	0.1g	160mm ø
EBL 6201e	6200g	0.1g	160mm ø
EBL 8201e	8200g	0.1g	160mm ø
EBL 12001e	12000g	0.1g	400x300mm
EBL 16001e	16000g	0.1g	400x300mm
EBL 22001e	22000g	0.1g	400x300mm
EBL 32001e	32000g	0.1g	400x300mm
EBL 12001P	12000g	0.1g	400x300mm
EBL 16001P	16000g	0.1g	400x300mm
EBL 22001P	22000g	0.1g	400x300mm
EBL 32001P	32000g	0.1g	400x300mm

## Internal Calibration

Model	Capacity	Readability	Pan Size
EBL 104i	100g	0.0001g	90mm ø
EBL 164i	160g	0.0001g	90mm ø
EBL 214i	210g	0.0001g	90mm ø
EBL 254i	250g	0.0001g	90mm ø
EBL 314i	310g	0.0001g	90mm ø
EBL 223i	220g	0.001g	120mm ø
EBL 423i	420g	0.001g	120mm ø
EBL 623i	620g	0.001g	160mm ø
EBL 823i	820g	0.001g	160mm ø
EBL 1023i	1020g	0.001g	160mm ø
EBL 1623i	1620g	0.001g	160mm ø
EBL 1602i	1600g	0.01g	160mm ø
EBL 2602i	2600g	0.01g	160mm ø
EBL 3602i	3600g	0.01g	160mm ø
EBL 4602i	4600g	0.01g	160mm ø
EBL 6202i	6200g	0.01g	160mm ø





Analytical Models

***Innovative design combined with powerful performance in a premier balance***

## GENERAL SPECIFICATIONS

- Weighing units: g, mg, kg, ct, GN, N, oz, ozt, dwt, T, custom unit
- Interface: RS-232, USB
- Power Supply: 18VDC 50/60Hz 830mA adapter
- Display: Backlit LCD with 20mm-high digits
- Calibration: External and internal calibration
- Housing: Extruded aluminum base with a die-cast aluminum case
- Operating Temperature: 15° to 35°C

## APPLICATIONS

- Weighing
- Parts counting
- Percentage weighing
- Dynamic / animal weighing
- Density determination

## FEATURES

- Vivid, backlit LCD easily visible in any lighting conditions
- Colour-coded keys facilitate quick recognition of the most frequently used buttons
- Level indicator and adjusting feet ensure proper balance setup for optimum weighing results
- Removable draught shield on models with 0.001g readability helps to reduce errors caused by air currents
- Robust metal housing protects internal components in harsh environments
- Sealed keypad protects against dirt and accidental spills
- USB and RS-232 interfaces provide speedy communication with computers and printers
- Large, grade 304 stainless steel pan allows easy cleaning
- Lockdown device to secure balance
- Handles for safely lifting the balance
- External calibration allows for verification and adjustment with weights
- Printouts include date and time for data tracking within Good Laboratory Practices (GLP) guidelines
- Selectable digital filtering helps minimise effects of vibration and disturbances
- Zero-tracking feature ensures display returns to zero reading
- Multilingual display allows use in many different countries
- AC adapter included

## WEIGHT AND DIMENSIONS (Internal Calibration same as External Calibration)

- **NBL 84e, NBL 124e, NBL 164e, NBL 214e, NBL 254e:**  
Net Weight - 4.5kg, Overall Dim. - 220x340x344mm (wxdxh)
- **NBL 223e, NBL 423e:** Net Weight - 4.5kg, Overall Dim. - 220x310x270mm (wxdxh)
- **NBL 1602e, NBL 2602e, NBL 3602e, NBL 4602e, NBL 4201e, NBL 6201e, NBL 8201e:**  
Net Weight - 4.5kg, Overall Dim. - 220x310x89mm (wxdxh)
- **NBL 12001e, NBL 16001e, NBL 22001e:**  
Net Weight - 7.3kg, Overall Dim. - 401x460x102mm (wxdxh)
- **NBL 12001P, NBL 16001P, NBL 22001P (Pillar Attachment):**  
Net Weight - 7.5kg, Overall Dim. - 401x500x600mm (wxdxh)

## ACCESSORIES

Item number	Description
<b>104008036</b>	Anti-vibration table
1060012713	Density kit for 90mm ø
<b>1060012714</b>	Density kit for 120mm ø and 160mm ø pan
3012313007	Dust cover for 0.1mg balances
3012313008	Dust cover for 0.01g and 0.001g
3012313009	In-use wet cover for 90mm ø pan
3012313010	In-use wet cover for 120mm ø and 160mm ø pan
3012313012	In-use wet cover for 400x300mm pan
<b>1120011156</b>	ATP thermal printer
3126011263	ATP thermal printer paper
3126011281	ATP thermal printer paper (pack of 10)
3014011014	RS-232 cable
600002028	Adam DU data collection program
3074010267	USB cable
302126013	Weigh-below hook for 400x300mm pan
3021210953	Weigh-below hook
2010012712	Battery pack (factory installed, available on select models)
3014013041	Security lock cable
700660290	Calibration certificate



104008036



1120011156



1060012714

## External Calibration

Model	Capacity	Readability	Pan Size
NBL 84e	80g	0.0001g	90mm ø
NBL 124e	120g	0.0001g	90mm ø
NBL 164e	160g	0.0001g	90mm ø
NBL 214e	210g	0.0001g	90mm ø
NBL 254e	250g	0.0001g	90mm ø
NBL 223e	220g	0.001g	120mm ø
NBL 423e	420g	0.001g	120mm ø
NBL 623e	620g	0.001g	160mm ø
NBL 823e	820g	0.001g	160mm ø
NBL 1602e	1600g	0.01g	160mm ø
NBL 2602e	2600g	0.01g	160mm ø
NBL 3602e	3600g	0.01g	160mm ø
NBL 4602e	4600g	0.01g	160mm ø
NBL 4201e	4200g	0.1g	160mm ø
NBL 6201e	6200g	0.1g	160mm ø
NBL 8201e	8200g	0.1g	160mm ø
NBL 12001e	12000g	0.1g	400x300mm
NBL 16001e	16000g	0.1g	400x300mm
NBL 22001e	22000g	0.1g	400x300mm
NBL 12001P	12000g	0.1g	400x300mm
NBL 16001P	16000g	0.1g	400x300mm
NBL 22001P	22000g	0.1g	400x300mm

## Internal Calibration

Model	Capacity	Readability	Pan Size
NBL 84i	80g	0.0001g	90mm ø
NBL 124i	120g	0.0001g	90mm ø
NBL 164i	160g	0.0001g	90mm ø
NBL 214i	210g	0.0001g	90mm ø
NBL 254i	250g	0.0001g	90mm ø
NBL 223i	220g	0.001g	120mm ø
NBL 423i	420g	0.001g	120mm ø
NBL 623i	620g	0.001g	160mm ø
NBL 823i	820g	0.001g	160mm ø
NBL 1602i	1600g	0.01g	160mm ø
NBL 2602i	2600g	0.01g	160mm ø
NBL 3602i	3600g	0.01g	160mm ø
NBL 4602i	4600g	0.01g	160mm ø



## Jewellery Models

Model	Capacity	Readability	Pan Size
NBL 214Je	210g	0.0001g	90mm ø
NBL 214Ji	210g	0.0001g	90mm ø



Precision Models



## ACCESSORIES

Item number	Description
700100207	E2 1g to 200g calibration weight Set
700100042	F1 1mg - 500g Calibration weight Set
700100027	F1 1g - 100g calibration weight Set
700100049	F1 1g -200g Calibration weight Set
700100070	F1 1g - 2kg calibration weight Set
700100232	E2 50g calibration weight
700100022	E2 100g calibration weight
700100023	E2 200g calibration weight
700100007	F1 100g calibration weight
700100012	F1 200g calibration weight
700100008	F1 500g calibration weight
700100009	F1 1kg calibration weight
700100010	F1 2kg calibration weight
700100013	F1 5kg calibration weight
700100209	2 x F1 5kg calibration weights



700100207 / 700100042



## FEATURES

- Vivid, backlit LCD easily visible in any lighting conditions
- Programmable backlight can be set to "always on," "always off" or "light only when weighing"
- Capacity tracker built into display for easily monitoring possible overloads
- Balances stack efficiently and safely to save space (120mm pan size only)
- Colour-coded keys facilitate quick recognition of the most frequently used buttons
- Dual tare keys facilitate operation with either the left or right hand
- Level indicator and adjustable feet ensure proper balance setup for optimum weighing results
- Security slot for optional Kensington-type lock and cable to help prevent theft
- Large, grade 304 stainless steel pan allows easy cleaning
- RS-232 interface for connection to computers and printers
- USB interface included for faster data communication
- Solid ABS housing is durable for industrial uses
- Three-point ShockProtect® feature helps prevent overload damage to internal components
- Hook included for weighing below the balance
- Internal calibration eliminates need for external weight set
- Audible overload alarm warns when capacity has been exceeded
- External calibration allows for verification and adjustment with weights
- Selectable digital filtering helps minimise effects of vibration and disturbances
- Parts counting with preset sample sizes
- Memory accumulation totals results
- Zero-tracking feature ensures display returns to zero reading
- AC adapter included
- Rechargeable battery included for operation almost anywhere
- Programmable auto power-off to save energy

*Full of features, the Highland is an exceptional value in precision weighing*

## GENERAL SPECIFICATIONS

- Weighing units: g, lb, oz, N, GN, ct, dr, dwt, mm, ozt, T, tl.H, tl.S, tl.T
- Interface: RS-232 / USB
- Power Supply: 12VDC 50/60Hz 800mA adapter / Internal rechargeable battery
- Display: Backlit LCD with 18mm-high digits
- Calibration: External calibration / Internal manual calibration
- Housing: ABS plastic
- Operating Temperature: 0° to 40°C

## APPLICATIONS

- Weighing
- Parts counting
- Percentage weighing
- Accumulation of weight

## WEIGHT AND DIMENSIONS

- Net Weight - 2kg, Overall Dim. - 174x252x80mm (wxdxh)

Model	Capacity	Readability	Pan Size
<b>HCB 123</b>	120g	0.001g	120mm ø
<b>HCB 153</b>	150g	0.005g	120mm ø
<b>HCB 302</b>	300g	0.01g	120mm ø
<b>HCB 602</b>	600g	0.02g	120mm ø
<b>HCB 602H</b>	600g	0.01g	120mm ø
<b>HCB 1002</b>	1000g	0.01g	120mm ø
<b>HCB 1502</b>	1500g	0.05g	120mm ø
<b>HCB 3001</b>	3000g	0.1g	120mm ø



## ACCESSORIES

Item number	Description
<b>308002042</b>	Hard carrying case with lock
308232030	In-use cover
308232034	In-use cover (pack of 5)
308232035	In-use cover (pack of 10)
<b>1120011156</b>	ATP thermal printer
3126011263	ATP thermal printer paper
3126011281	ATP thermal printer paper (pack of 10)
3074010266	RS-232 cable (null-modem) to PC cable
<b>700100046</b>	Kensington-type lock and cable
600002028	Adam DU data collection program
3074010267	USB cable
700660290	Calibration certificate

Item number	Description
700100007	F1 100g calibration weight (HCB 123, 153)
700100012	F1 200g calibration weight (HCB 302, 602, 602H)
700100009	F1 1kg calibration weight (HCB 1002, 1502)
700100010	F1 2kg calibration weight (HCB 3001)



**308002042**



**1120011156**



**700100046**



## FEATURES

- Vivid, backlit LCD easily visible in any lighting conditions
- Programmable backlight can be set to "always on," "always off" or "light only when weighing"
- Balances stack efficiently and safely to save space (120mm pan size only)
- Colour-coded keys facilitate quick recognition of the most frequently used buttons
- Dual tare keys facilitate operation with either the left or right hand
- Security slot for optional Kensington-type lock and cable to help prevent theft
- Large, grade 304 stainless steel pan allows easy cleaning
- Rugged construction stands up to industrial use
- Three-point ShockProtect® feature helps prevent overload damage to internal components
- Hook included for weighing below the balance
- Auto power-off to save energy
- Audible overload alarm warns when capacity has been exceeded
- External calibration allows for verification and adjustment with weights
- Zero-tracking feature ensures display returns to zero reading
- Operates with AC adapter (included) or batteries (not included)

*The most durable compact balance in its class, the Core is unmatched in value*

## GENERAL SPECIFICATIONS

- Weighing units: g, kg, lb, oz, N, GN, ct, dr, tl, T
- Power Supply: 12VAC 50/60Hz 150mA adapter / 6 x AA batteries
- Display: Backlit LCD with 18mm-high digits
- Calibration: External calibration
- Housing: ABS plastic
- Operating Temperature: 0° to 40°C

## APPLICATIONS

- Weighing

## WEIGHT AND DIMENSIONS

- Net Weight - 0.9kg, Overall Dim. - 171x250x80mm (wxdxh)

Model	Capacity	Readability	Pan Size
<b>CQT 202</b>	200g	0.01g	120mm ø
<b>CQT 251</b>	250g	0.1g	120mm ø
<b>CQT 601</b>	600g	0.1g	120mm ø
<b>CQT 1501</b>	1500g	0.1g	120mm ø
<b>CQT 2000</b>	2000g	1g	145mm ø
<b>CQT 2601</b>	2600g	0.1g	145mm ø
<b>CQT 5000</b>	5000g	1g	145mm ø



## ACCESSORIES

Item number	Description
<b>308002042</b>	Hard carrying case with lock
308232033	In-use cover
308232036	In-use cover (pack of 5)
308232037	In-use cover (pack of 10)
<b>700100046</b>	Kensington-type lock and cable
700660290	Calibration certificate
700100035	M1 1g - 100g calibration weight set
<b>700100071</b>	M1 1g - 2kg calibration weight set
700100072	M1 200g calibration weight (CQT 251)
700100060	M1 500g calibration weight (CQT 601)
700100029	M1 1kg calibration weight (CQT 1501)
700100030	M1 2kg calibration weight (CQT 2000, 2601, 5000)
700100012	F1 200g calibration weight (CQT 202)



**308002042**



**700100046**



**700100071**



## FEATURES

- Vivid, backlit LCD easily visible in any lighting conditions
- Large, grade 304 stainless steel pan allows easy cleaning
- Lightweight design simplifies transport and portability
- Sealed keypad protects against dirt and spills
- Level indicator and adjustable feet ensure proper balance setup for optimum weighing results
- Auto power-off to save energy
- External calibration allows for verification and adjustment with weights
- Simple operation allows quick startup and use with little or no training
- Zero-tracking feature ensures display returns to zero reading
- Low-battery indicator alerts users when batteries need replacement

*Provides features and consistency for portable performance*

## GENERAL SPECIFICATIONS

- Weighing units: g, lb, oz
- Power Supply: 2 x AA batteries / Optional 6VDC 200mA adapter
- Display: LCD with 12mm-high digits
- Calibration: External calibration
- Housing: ABS plastic
- Operating Temperature: 0° to 40°C

Model	Capacity	Readability	Pan Size
<b>CB 501</b>	500g	0.1g	130mm ø
<b>CB 1001</b>	1000g	0.1g	130mm ø
<b>CB 3000</b>	3000g	1g	130mm ø



## APPLICATIONS

- Weighing

## WEIGHT AND DIMENSIONS

- Net Weight - 0.4kg, Overall Dim. - 160x205x45mm (wxdxh)

## ACCESSORIES

Item number	Description
700400120	6VDC 200mA adapter
700230015	In-use cover
700660290	Calibration certificate
700100060	M1 500g calibration weight (CB 501)
700100029	M1 1kg calibration weight (CB 1001)



## FEATURES

- High-contrast display is easily visible from a distance
- Colour-coded keys facilitate quick recognition of the most frequently used buttons
- Lightweight design simplifies transport and portability
- Overload protection helps prevent damage to internal components
- Sealed keypad protects against dirt and accidental spills
- Large platform removes easily for speedy cleaning
- Auto power-off to save energy
- External calibration allows for verification and adjustment with weights
- Zero-tracking feature ensures display returns to zero reading
- Operates with AC adapter (included) or batteries (not included)

*Streamlined design for basic weighing in the lab, classroom or field*

## GENERAL SPECIFICATIONS

- Weighing units: g, oz
- Power Supply: 12VAC 50/60Hz 150mA adapter / 6 x AA batteries
- Display: LCD with 15mm-high digits
- Calibration: External calibration
- Housing: ABS plastic
- Operating Temperature: 0° to 40°C

Model	Capacity	Readability	Pan Size
<b>DCT 201</b>	200g	0.1g	145x145mm
<b>DCT 2000</b>	2000g	1g	145x145mm
<b>DCT 5000</b>	5000g	2g	145x145mm



## APPLICATIONS

- Weighing

## WEIGHT AND DIMENSIONS

- Net Weight - 0.5kg, Overall Dim. - 147x208x40mm (wxdxh)

## ACCESSORIES

Item number	Description
700660290	Calibration certificate
700100072	M1 200g calibration weight (DCT 201)
700100030	M1 2kg calibration weight (DCT 2000)



## FEATURES

- Optional hook enables below-balance weighing
- Security slot for optional Kensington-type lock and cable to help prevent theft
- Large, grade 304 stainless steel pan allows easy cleaning
- Magnetic damping slows pointer movement for faster readings
- Notched, tiered, graduated beams ensure positive positioning and accurate reading of results
- Storing space for weights included
- The TBB 2610T is equipped with a 225g tare range

*A reliable, classic balance for performing mass measurement*

## GENERAL SPECIFICATIONS

- Weighing units: g
- Display: Graduated beam
- Calibration: External calibration
- Housing: Die-cast aluminum

Model	Capacity	Readability	Pan Size
<b>TBB 2610S</b>	2610g	0.1g	152mm ø
<b>TBB 2610T</b>	2610g	0.1g	152mm ø



## APPLICATIONS

- Weighing

## WEIGHT AND DIMENSIONS

- Net Weight - 2.7kg, Overall Dim. - 550x110x160mm (wxdxh)

## ACCESSORIES

Item number	Description
<b>700100046</b>	Kensington-type lock and cable
700660290	Calibration certificate



**700100046**

# MOISTURE ANALYSER

With simple operation and quick response time, Adam Equipment's PMB moisture analyser is top in its class for value. PMB sets a new standard for collecting and recording data, with USB and RS-232 interfaces to provide speedy connectivity. A second USB port allows storage of test programs and data on a flash drive. The PMB's automatic test-setting function enables easy recall for frequent testing of the same items without additional user programming.



**Featured Product:**  
PMB Analyser



## FEATURES

- Vivid, backlit LCD easily visible in any lighting conditions
- Programmable backlight can be set to "always on," "always off" or "light only when weighing"
- Capacity tracker built into display for easily monitoring possible overloads
- Scratch-resistant aluminum housing protects internal components
- Colour-coded keys facilitate quick recognition of the most frequently used buttons
- Pan lifter allows easy placement and removal of samples
- RS-232 interface for connection to computers and printers
- USB host for memory card and USB I/O interface
- USB interface included for faster data communication
- Temperature range 50°C to 160°C in one-degree increments
- Three settings for heating sample include ramp-up, stepped temperatures and single temperature
- Seven preset drying modes allow test routines for several products
- Audible overload alarm warns when capacity has been exceeded
- Testing can be set to start automatically when lid closes
- Calibration for temperature and weight
- Multilingual display allows use in many different countries
- Quick and easy configuration using the keypad
- Zero-tracking feature ensures display returns to zero reading
- Internal memory stores 49 different recipes and up to 99 test results, and additional test results and settings can be stored on a flash drive
- Mains power cord

**Superior connectivity in a moisture analyser, with two USB ports for data collection and computer or printer communications**

## GENERAL SPECIFICATIONS

- Weighing units: g, %M, %S, ATRO %M, ATRO %S
- Interface: RS-232 / USB
- Power Supply: Mains power cord
- Display: Backlit LCD with 24mm-high digits
- Calibration: External calibration
- Housing: Die-cast aluminum
- Operating Temperature: 0° to 40°C

Model	Capacity	Readability	Pan Size
<b>PMB 53</b>	50g	0.001g / 0.01%	100mm ø
<b>PMB 202</b>	200g	0.01g / 0.05%	100mm ø



## APPLICATIONS

- Weighing
- Moisture determination

## WEIGHT AND DIMENSIONS

- Net Weight - 6kg, Overall Dim. - 250x360x185mm (wxdxh)

## ACCESSORIES

Item number	Description
104008036	Anti-vibration table
<b>1070010636</b>	Temperature calibration kit
301208188	In-use cover
<b>1120011156</b>	ATP thermal printer
3126011263	ATP thermal printer paper
3126011281	ATP thermal printer paper (pack of 10)
3074010266	RS-232 cable (null-modem)
<b>307140001</b>	Disposable sample pans (pack of 250)
700100046	Kensington-type lock and cable
600002028	Adam DU data collection program
3074010267	USB cable
700660290	Calibration certificate
700100027	F1 1g - 100g calibration weight set
700100014	F1 50g calibration weight (PMB 53)
700100012	F1 200g calibration weight (PMB 202)



**1070010636**



**1120011156**

**307140001**

# BENCH & FLOOR WEIGHING SCALES

The all stainless steel Astro provides accurate measurements for weighing small objects or ingredients in a variety of industries. The durable construction of the Astro is splash proof and can quickly be wiped down. A large LCD shows results in green during normal weighing. If the scale is overloaded or is not set on a level surface, readings will be shown in red, clearly notifying the user that they are not receiving precise results. Astro comes with an AC adapter but can be powered by battery for applications that require a portable weighing solution.

Lightweight and portable, the LBK is a winning value for factories, warehouses, labs and offices. Cleaning is simple with the removable stainless steel pan and sealed keypad, while a large, backlit display makes it easy to view the weight. For speedy operation, colour-coded keys highlight frequently used functions.

Reliability and durable construction make the CBK unmatched in value for industrial weighing. Fully featured and easy to use, the CBK tackles a variety of applications, including parts counting, percentage weighing, check counting and accumulation. Checkweighing is simplified with LED limit indicators, while the built-in memory stores limits for up to 10 samples.

Adam Equipment's CPWplus bench and floor scales provide valuable features and various configurations to meet the demands of many industrial operations. With simple operation, rugged construction and an easy-to-clean stainless steel pan, the CPWplus offers exceptional value for warehouse, manufacturing, and shipping and receiving tasks.

Designed for demanding industrial use, GBK and GBK-M scales are durable and consistently deliver fast readings. The GBK provides a sturdy type 304 stainless steel pan and non-slip rubber feet to ensure stability in any location. Other features include overload protection and a large, easy-to-read backlit LCD. The GBK-M version is approved and suitable for use on products sold by weight.

With easy operation and reliable performance, the ABK is well-suited for demanding industrial use. The type 304 stainless steel pan and indicator offer protection against dust and water, ensuring longevity. ABK features a large, backlit display and checkweighing limit lights to streamline shipping tasks and reduce data entry errors.

GFK scales feature large platforms, high capacities and robust construction, making them ideal for heavy-duty industrial tasks. Equipped with non-slip rubber feet, overload protection, and a type 304 stainless steel pan, GFK brings durability and outstanding value to manufacturing environments. The GFK-M version is approved and suitable for use on products sold by weight.

Sturdy and reliable, AFK scales offer a dependable weighing solution for many industrial applications. To ensure longevity, a type 304 stainless steel indicator boasts superior sealing against dust and water. The backlit display is easy to read, streamlining shipping and receiving tasks and helping prevent data entry errors. Checkweighing is simple, as colour indicators show if the weight is under, over, or within preset limits.



**Featured Product:**  
**ABK Bench Weighing Scale**



## FEATURES

- Vivid, backlit LCD easily visible in any lighting conditions
- Adjustable levelling feet help optimise setup
- Colour-coded keys facilitate quick recognition of the most frequently used buttons
- Large, grade 304 stainless steel pan allows easy cleaning
- Overload protection helps prevent damage to internal components
- Rugged stainless steel housing for ultimate durability
- Sealed keypad protects against dirt and spills
- Splash-proof housing, keypad and display mean easy cleaning
- Auto power-off to save energy
- External calibration allows for verification and adjustment with weights
- Operates with AC adapter (included) or batteries (not included)
- Low-battery indicator alerts users when batteries need replacement

*Sleekly designed, the compact Astro is easy to clean between weighing tasks*

## GENERAL SPECIFICATIONS

- Capacity: 2000g to 8000g
- Readability: 0.1g to 1g
- Weighing units: g, kg, lb, lb:oz, oz
- Power Supply: 6VDC 500mA adapter / 2 x AAA batteries
- Display: LCD with 18mm-high digits
- Calibration: External calibration
- Housing: Stainless steel
- Operating Temperature: 0° to 40°C

Model	Capacity	Readability	Pan Size
ASC 2001	2000g	0.1g	160x180mm
ASC 4001	4000g	0.5g	160x180mm
ASC 8000	8000g	1g	160x180mm



## APPLICATIONS

- Weighing

## WEIGHT AND DIMENSIONS

- Net Weight - .85kg, Overall Dim. - 212x167x66mm (wxdxh)



## FEATURES

- Vivid, backlit LCD easily visible in any lighting conditions
- Colour-coded keys facilitate quick recognition of the most frequently used buttons
- Level indicator and adjustable feet ensure proper balance setup for optimum weighing results
- Large, grade 304 stainless steel pan allows easy cleaning
- Lightweight design simplifies transport and portability
- Splash-proof housing, keypad and display mean easy cleaning and peace of mind
- Solid ABS housing is durable for industrial uses
- Audible overload alarm warns when capacity has been exceeded
- External calibration allows for verification and adjustment with weights
- Parts counting with preset sample sizes
- Zero-tracking feature ensures display returns to zero reading
- AC adapter included
- Rechargeable battery included for operation almost anywhere
- Programmable auto power-off to save energy

*The LBK provides the best value for quick, basic weighing*

## GENERAL SPECIFICATIONS

- Weighing units: g, kg, lb, lb:oz, oz
- Power Supply: Mains power cord / Internal rechargeable battery
- Display: Backlit LCD with 24mm-high digits
- Calibration: External calibration
- Housing: ABS plastic / Stainless Steel Top Pan
- Operating Temperature: 0° to 40°C

Model	Capacity	Readability	Pan Size
<b>LBK 3</b>	3kg	0.5g	250x180mm
<b>LBK 6</b>	6kg	1g	250x180mm
<b>LBK 12</b>	12kg	2g	250x180mm
<b>LBK 30</b>	30kg	5g	250x180mm



## APPLICATIONS

- Weighing
- Parts counting
- Percentage weighing

## WEIGHT AND DIMENSIONS

- Net Weight - 1.8kg, Overall Dim. - 250x307x110mm (wxdxh)

## ACCESSORIES

Item number	Description
700200056	In-use cover
700200063	In-use cover (pack of 5)
700200064	In-use cover (pack of 10)
700660290	Calibration certificate



## FEATURES

- Vivid, backlit LCD easily visible in any lighting conditions
- Capacity tracker built into display for easily monitoring possible overloads
- Checkweighing LEDs light to clearly show under, over and acceptable limits
- Programmable backlight can be set to "always on," "always off" or "light only when weighing"
- Colour-coded keys facilitate quick recognition of the most frequently used buttons
- Level indicator and adjustable feet ensure proper balance setup for optimum weighing results
- Large, grade 304 stainless steel pan allows easy cleaning
- RS-232 interface for connection to computers and printers
- Optional USB interface simplifies data communication
- Rugged construction stands up to industrial use
- Sealed keypad protects against dirt and spills
- Overload protection helps prevent damage to internal components
- Checkweighing with audible alarm
- External calibration allows for verification and adjustment with weights
- Memory accumulation totals results
- Preset tare function speeds the process of repetitive weighing
- Parts counting with freely selectable sample sizes
- Parts counting optimisation automatically refines piece weight as parts are added
- Programmable for counting to a preset number of parts
- Printouts include date and time for data tracking within Good Laboratory Practices (GLP) guidelines
- Simple operation allows quick startup and use with little or no training
- Selectable digital filtering helps minimise effects of vibration and disturbances
- Zero-tracking feature ensures display returns to zero reading
- Rechargeable battery included for operation almost anywhere
- Programmable auto power-off to save energy

## Powerful choice for reliability in industrial weighing and counting

### GENERAL SPECIFICATIONS

- Weighing units: g, kg, lb, lb:oz, oz
- Interface: RS-232 / Optional USB
- Power Supply: Mains power cord / Internal rechargeable battery
- Display: Backlit LCD with 20mm-high digits
- Calibration: External calibration
- Housing: ABS plastic / Stainless Steel Top Pan
- Operating Temperature: 0° to 40°C

### APPLICATIONS

- Weighing
- Parts counting
- Percentage weighing
- Checkweighing
- Accumulation of weight

### WEIGHT AND DIMENSIONS

- Net Weight - 4.1kg, Overall Dim.- 315x355x110mm (wxdxh)

Model	Capacity	Readability	Pan Size
<b>CBK 4</b>	4kg	0.1g	225x275mm
<b>CBK 8</b>	8kg	0.2g	225x275mm
<b>CBK 8H</b>	8kg	0.1g	225x275mm
<b>CBK 16</b>	16kg	0.5g	225x275mm
<b>CBK 32</b>	32kg	1g	225x275mm
<b>CBK 48</b>	48kg	2g	225x275mm

### Approved Models EC Type Approved

Model	Capacity	Readability	Pan Size
<b>CBK 3M</b>	3kg	1g	225x275mm
<b>CBK 6M</b>	6kg	2g	225x275mm
<b>CBK 15M</b>	15kg	5g	225x275mm
<b>CBK 30M</b>	30kg	10g	225x275mm



### ACCESSORIES

Item number	Description
<b>30200001</b>	Hard carrying case with lock
302205006	In-use cover
700200057	In-use cover (pack of 5)
700200058	In-use cover (pack of 10)
<b>1120011156</b>	ATP thermal printer
3126011263	ATP thermal printer paper
3126011281	ATP thermal printer paper (pack of 10)
<b>3074010266</b>	RS-232 cable (null-modem)
3074010507	RS-232 to USB adapter (must order corresponding RS-232 cable)
600002028	Adam DU data collection program
202000001	Weigh-below hook (factory-fitted)
700660290	Calibration certificate



30200001



3074010266



1120011156



## FEATURES

- Vivid, backlit LCD easily visible in any lighting conditions
- Programmable backlight can be set to “always on,” “always off” or “light only when weighing”
- Colour-coded keys facilitate quick recognition of the most frequently used buttons
- Large, grade 304 stainless steel pan allows easy cleaning
- Lightweight design simplifies transport and portability
- Rugged construction stands up to industrial use
- Splash-proof housing, keypad and display mean easy cleaning
- Wall-mount bracket for placing indicator on vertical surface
- Auto power-off to save energy
- External calibration allows for verification and adjustment with weights
- Hold function freezes the displayed weight, allowing time to lapse without losing the result
- Selectable digital filtering helps minimise effects of vibration and disturbances
- Zero-tracking feature ensures display returns to zero reading

*The most flexible series of scales, offering multiple configurations to suit a variety of applications*

## GENERAL SPECIFICATIONS

- Weighing units: kg, lb, lb:oz, oz
- Interface: RS-232
- Power Supply: 12VDC 50/60Hz 150mA adapter / 6 x AA batteries (300x300mm model only)
- Power Supply: 12VDC 50/60Hz 500mA adapter / Internal Rechargeable Battery (M & L models only)
- Display: Backlit LCD with 22mm-high digits
- Calibration: External calibration
- Housing: Mild steel base / Stainless Steel Top Pan
- Operating Temperature: 0° to 40°C

## APPLICATIONS

- Weighing
- Display hold

## WEIGHT AND DIMENSIONS

- **CPWplus 6, CPWplus 15, CPWplus 35, CPWplus 75, CPWplus 150, CPWplus 200:**  
Net Weight - 4kg, Overall Dim.- 300x300x50mm (wxdxh)
- **CPWplus 35M, CPWplus 75M, CPWplus 150M, CPWplus 200M:**  
Net Weight - 8.9kg, Overall Dim.- 500x500x78mm (wxdxh)
- **CPWplus 35L, CPWplus 75L, CPWplus 150L, CPWplus 200L, CPWplus 300L:**  
Net Weight - 14.4kg, Overall Dim.- 900x600x78mm (wxdxh)

Model	Capacity	Readability	Pan Size
<b>CPWplus 6</b>	6kg	0.002kg	300x300mm
<b>CPWplus 15</b>	15kg	0.005kg	300x300mm
<b>CPWplus 35</b>	35kg	0.01kg	300x300mm
<b>CPWplus 75</b>	75kg	0.02kg	300x300mm
<b>CPWplus 150</b>	150kg	0.05kg	300x300mm
<b>CPWplus 200</b>	200kg	0.05kg	300x300mm
<b>CPWplus 35M</b>	35kg	0.01kg	500x500mm
<b>CPWplus 75M</b>	75kg	0.02kg	500x500mm
<b>CPWplus 150M</b>	150kg	0.05kg	500x500mm
<b>CPWplus 200M</b>	200kg	0.05kg	500x500mm
<b>CPWplus 35L</b>	35kg	0.01kg	900x600mm
<b>CPWplus 75L</b>	75kg	0.02kg	900x600mm
<b>CPWplus 150L</b>	150kg	0.05kg	900x600mm
<b>CPWplus 200L</b>	200kg	0.05kg	900x600mm
<b>CPWplus 300L</b>	300kg	0.1kg	900x600mm



## ACCESSORIES

Item number	Description
<b>700100099</b>	Hard carrying case with lock (300 x 300mm pan size only)
<b>1120011156</b>	ATP thermal printer
3126011263	ATP thermal printer paper
3126011281	ATP thermal printer paper (pack of 10)
<b>700200059</b>	Non-slip rubber mat (CPWplus L only)
3074010266	RS-232 cable (null-modem)
3074010507	RS-232 to USB adapter (must order corresponding RS-232 cable)
600002028	Adam DU data collection program
700660290	Calibration certificate



**700100099**



**700200059**



**1120011156**



## FEATURES

- Vivid, backlit LCD easily visible in any lighting conditions
- Capacity tracker built into display for easily monitoring possible overloads
- Checkweighing LEDs light to clearly show under, over and acceptable limits
- Programmable backlight can be set to “always on,” “always off” or “light only when weighing”
- Colour-coded keys facilitate quick recognition of the most frequently used buttons
- Level indicator and adjusting feet ensure proper balance setup for optimum weighing results
- Large, grade 304 stainless steel pan allows easy cleaning
- RS-232 interface for connection to computers and printers
- Rugged construction stands up to industrial use
- Sealed keypad protects against dirt and spills
- Overload protection helps prevent damage to internal components
- Checkweighing with audible alarm
- External calibration allows for verification and adjustment with weights
- Memory accumulation totals results
- Parts counting with freely selectable sample sizes
- Parts counting optimisation automatically refines piece weight as parts are added
- Preset tare function speeds the process of repetitive weighing
- Selectable digital filtering helps minimise effects of vibration and disturbances
- Zero-tracking feature ensures display returns to zero reading
- Rechargeable battery included for operation almost anywhere
- Programmable auto power-off to save energy

## The best solution for demanding industrial and manufacturing tasks

### GENERAL SPECIFICATIONS

- Weighing units: g, kg
- Interface: RS-232, Optional USB
- Power Supply: Mains power cord / Internal rechargeable battery
- Display: Backlit LCD with 20mm-high digits
- Calibration: External calibration
- Housing: Die-cast aluminum /Stainless Steel Top Pan
- Operating Temperature: -10° to 40°C

### APPLICATIONS

- Weighing
- Parts counting
- Percentage weighing
- Checkweighing
- Dynamic / animal weighing
- Accumulation of weight

### WEIGHT AND DIMENSIONS

- Net Weight - 7.6kg, Overall Dim. - 300x520x680mm (wxdxh)

Model	Capacity	Readability	Pan Size
<b>GBK 8</b>	8kg	0.1g	300x400mm
<b>GBK 16</b>	16kg	0.5g	300x400mm
<b>GBK 32</b>	32kg	1g	300x400mm
<b>GBK 60</b>	60kg	2g	300x400mm
<b>GBK 120</b>	120kg	5g	300x400mm

## Approved Models EC Type Approved

Model	Capacity	Readability	Pan Size
<b>GBK 6M</b>	6kg	2g	300x400mm
<b>GBK 15M</b>	15kg	5g	300x400mm
<b>GBK 30M</b>	30kg	10g	300x400mm
<b>GBK 60M</b>	60kg	20g	300x400mm
<b>GBK 150M</b>	150kg	50g	300x400mm



### ACCESSORIES

Item number	Description
3052010526	In-use cover
1120011156	ATP thermal printer
3126011263	ATP thermal printer paper
3126011281	ATP thermal printer paper (pack of 10)
3074010266	RS-232 cable (null-modem)
3074010507	RS-232 to USB adapter (must order corresponding RS-232 cable)
600002028	Adam DU data collection program
700660290	Calibration certificate



## FEATURES

- Vivid, backlit LCD easily visible in any lighting conditions
- Capacity tracker built into display for easily monitoring possible overloads
- Programmable backlight can be set to "always on," "always off" or "light only when weighing"
- Checkweighing LEDs light to clearly show under, over and acceptable limits
- Colour-coded keys facilitate quick recognition of the most frequently used buttons
- Heavy-duty rubber feet ensure stability of unit
- Large, grade 304 stainless steel pan allows easy cleaning
- RS-232 interface for connection to computers and printers
- Rugged construction stands up to industrial use
- Sealed keypad protects against dirt and accidental spills
- Checkweighing with audible alarm
- External calibration allows for verification and adjustment with weights
- Parts counting with preset sample sizes
- Simple operation allows quick startup and use with little or no training
- Zero-tracking feature ensures display returns to zero reading
- AC adapter included
- Rechargeable battery included for operation almost anywhere
- Programmable auto power-off to save energy

**Right combination of features and performance make the ABK a winner for industrial applications**

## GENERAL SPECIFICATIONS

- Weighing units: g, kg, lb, lb:oz, oz, N
- Interface: RS-232
- Power Supply: 12VDC 50/60Hz 800mA adapter / Internal rechargeable battery
- Display: Backlit LCD with 40mm-high digits
- Calibration: External calibration
- Housing: Stainless steel indicator with die-cast aluminum base
- Operating Temperature: -10° to 40°C

Model	Capacity	Readability	Pan Size
<b>ABK 8</b>	8kg	0.2g	300x400mm
<b>ABK 16</b>	16kg	0.5g	300x400mm
<b>ABK 32</b>	32kg	1g	300x400mm
<b>ABK 60</b>	60kg	2g	300x400mm
<b>ABK 120</b>	120kg	5g	300x400mm



## APPLICATIONS

- Weighing
- Parts counting
- Checkweighing
- Dynamic / animal weighing
- Percentage weighing

## WEIGHT AND DIMENSIONS

- Net Weight - 7.9kg, Overall Dim. - 300x520x610mm (wxdxh)

## ACCESSORIES

Item number	Description
3102311619	In-use cover
<b>1120011156</b>	ATP thermal printer
3126011263	ATP thermal printer paper
3126011281	ATP thermal printer paper (pack of 10)
<b>700400103</b>	RS-232 cable
3074010507	RS-232 to USB adapter (must order corresponding RS-232 cable)
<b>1100011297</b>	AE402 relay box
600002028	Adam DU data collection program
700660290	Calibration certificate





## FEATURES

- Vivid, backlit LCD easily visible in any lighting conditions
- Programmable backlight can be set to “always on,” “always off” or “light only when weighing”
- Capacity tracker built into display for easily monitoring possible overloads
- Checkweighing LEDs light to clearly show under, over and acceptable limits
- Adjustable leveling feet help optimise setup
- Colour-coded keys facilitate quick recognition of the most frequently used buttons
- Large, grade 304 stainless steel pan allows easy cleaning
- RS-232 interface for connection to computers and printers
- Sealed keypad protects against dirt and accidental spills
- Audible overload alarm warns when capacity has been exceeded
- Checkweighing with audible alarm
- Parts counting with freely selectable sample sizes
- Parts counting optimisation automatically refines piece weight as parts are added
- Preset tare function speeds the process of repetitive weighing
- Programmable for counting to a preset number of parts
- Selectable digital filtering helps minimise effects of vibration and disturbances
- Zero-tracking feature ensures display returns to zero reading
- Rechargeable battery included for operation almost anywhere
- Programmable auto power-off to save energy

## Industrial scale's proven strength brings large-scale benefits

### GENERAL SPECIFICATIONS

- Weighing units: g, kg
- Interface: RS-232, Optional USB
- Power Supply: Mains power cord / Internal rechargeable battery
- Display: Backlit LCD with 20mm-high digits
- Calibration: External calibration
- Housing: Die-cast aluminum / Stainless Steel Top Pan
- Operating Temperature: -10° to 40°C

### APPLICATIONS

- Weighing
- Parts counting
- Percentage weighing
- Checkweighing
- Check counting
- Dynamic / animal weighing

### WEIGHT AND DIMENSIONS

- Net Weight - 12.5kg, Overall Dim.- 400x620x860mm (wxdxh)
- **GFK 600:** Net Weight - 25.5kg, Overall Dim.- 600x940x900mm (wxdxh)

Model	Capacity	Readability	Pan Size
<b>GFK 75</b>	75kg	5g	400x500mm
<b>GFK 75H</b>	75kg	1g	400x500mm
<b>GFK 150</b>	150kg	10g	400x500mm
<b>GFK 150H</b>	150kg	2g	400x500mm
<b>GFK 300</b>	300kg	20g	400x500mm
<b>GFK 600</b>	600kg	50g	600x800mm

## Approved Models EC Type Approved

Model	Capacity	Readability	Pan Size
<b>GFK 60M</b>	60kg	20g	400x500mm
<b>GFK 150M</b>	150kg	50g	400x500mm
<b>GFK 300M</b>	300kg	100g	400x500mm



### ACCESSORIES

Item number	Description
3052010526	In-use cover
1120011156	ATP thermal printer
3126011263	ATP thermal printer paper
3126011281	ATP thermal printer paper (pack of 10)
3074010266	RS-232 cable (null-modem)
3074010507	RS-232 to USB adapter (must order corresponding RS-232 cable)
600002028	Adam DU data collection program
700660288	Calibration certificate (IHS, LHS, AFK 600, GFK 600, PTM)
700660290	Calibration certificate



## FEATURES

- Vivid, backlit LCD easily visible in any lighting conditions
- Capacity tracker built into display for easily monitoring possible overloads
- Programmable backlight can be set to “always on,” “always off” or “light only when weighing”
- Checkweighing LEDs light to clearly show under, over and acceptable limits
- Colour-coded keys facilitate quick recognition of the most frequently used buttons
- Heavy-duty rubber feet ensure stability of unit
- Large, grade 304 stainless steel pan allows easy cleaning
- RS-232 interface for connection to computers and printers
- Rugged construction stands up to industrial use
- Sealed keypad protects against dirt and spills
- Wall-mount bracket for placing indicator on vertical surface
- Checkweighing with audible alarm
- External calibration allows for verification and adjustment with weights
- Parts counting with preset sample sizes
- Simple operation allows quick startup and use with little or no training
- Zero-tracking feature ensures display returns to zero reading
- AC adapter included
- Rechargeable battery included for operation almost anywhere
- Programmable auto power-off to save energy

## Extra-large pan for weighing oversized items or counting large quantities

### GENERAL SPECIFICATIONS

- Weighing units: g, kg, lb, lb:oz, oz, N
- Interface: RS-232
- Power Supply: 12VDC 50/60Hz 800mA adapter / Internal rechargeable battery
- Display: Backlit LCD with 40mm-high digits
- Calibration: External calibration
- Housing: Stainless steel indicator with die-cast aluminum base
- Operating Temperature: -10° to 40°C

Model	Capacity	Readability	Pan Size
<b>AFK 75</b>	75kg	5g	400x500mm
<b>AFK 150</b>	150kg	10g	400x500mm
<b>AFK 300</b>	300kg	20g	400x500mm
<b>AFK 600</b>	600kg	50g	600x800mm



### APPLICATIONS

- Weighing
- Parts counting
- Percentage weighing
- Checkweighing
- Dynamic / animal weighing

### WEIGHT AND DIMENSIONS

- **AFK 75, AFK 150, AFK 300:** Net Weight - 12.8kg, Overall Dim. - 400x620x790mm (wxdxh)
- **AFK 600:** Net Weight - 24.3kg, Overall Dim. - 600x940x830mm (wxdxh)

### ACCESSORIES

Item number	Description
3102311619	In-use cover
<b>1120011156</b>	ATP thermal printer
3126011263	ATP thermal printer paper
3126011281	ATP thermal printer paper (pack of 10)
<b>700400103</b>	RS-232 cable
3074010507	RS-232 to USB adapter (must order corresponding RS-232 cable)
<b>1100011297</b>	AE402 relay box
600002028	Adam DU data collection program
700660288	Calibration certificate (IHS, LHS, AFK 600, GFK 600, PTM)
700660290	Calibration certificate



1120011156

700400103

1100011297

# COUNTING SCALES



Created to accommodate most counting needs, the CBC offers features to tally a wide range of parts in industrial and manufacturing operations. The CBC is lightweight and portable, simplifying the scale's transport between locations during inventory. Intuitive software tracks the count and automatically optimises unit weight for greater accuracy.

The CBD features the ability to connect to an optional larger remote base, making it easy to count large numbers of items in oversized containers. Users can quickly switch between weighing on the built-in pan or an auxiliary platform. Freely selectable sample size is available using the numeric keypad, and the backlit display provides visibility in any lighting conditions.

Designed for rugged industrial counting tasks, the GBC boasts a combination of durability and valuable features. This hardy scale contains a numeric keypad for unit weight and sample entry, while a backlit display shows total weight, unit weight and number of pieces. Other features include overload protection, a grade 304 stainless steel pan and non-slip rubber feet.

With the ability to handle capacities up to 300kg, the GFC floor counting scale is well-suited for heavy-duty industrial settings. A numeric keypad facilitates unit weight and sample entry, while the easy-to-read backlit display shows total weight, unit weight, and number of pieces. Features such as overload protection, sturdy non-slip rubber feet and a grade 304 stainless steel pan give GFC the durability to withstand any counting task.

**Featured Product:  
GBC Counting Scale**



## FEATURES

- Programmable backlight can be set to "always on," "always off" or "light only when weighing"
- Backlit LCD shows weight, unit weight and count in one convenient location
- Colour-coded keys facilitate quick recognition of the most frequently used buttons
- Level indicator and adjusting feet ensure proper balance setup for optimum weighing results
- Large, grade 304 stainless steel pan allows easy cleaning
- RS-232 interface for connection to computers and printers
- Optional USB interface simplifies data communication
- Solid ABS housing is durable for industrial uses
- Auto power-off to save energy
- Parts counting with freely selectable sample sizes
- Internal counting resolution 1:600,000 for precision results
- Memory accumulation totals results
- Preset tare function speeds the process of repetitive weighing
- Zero-tracking feature ensures display returns to zero reading
- User can program alarm to sound when preset total is reached
- Rechargeable battery included for operation almost anywhere
- Programmable auto power-off to save energy

*With three easy-to-read displays, CBC speeds up counting and check counting tasks*

## GENERAL SPECIFICATIONS

- Weighing units: g, kg
- Interface: RS-232, Optional USB
- Power Supply: Mains power cord / Internal rechargeable battery
- Display: Backlit LCD with 20mm-high digits
- Calibration: External calibration
- Housing: ABS plastic / Stainless Steel Top Pan
- Operating Temperature: 0° to 40°C

## APPLICATIONS

- Parts counting
- Check counting
- Weighing
- Accumulation of weight

## WEIGHT AND DIMENSIONS

- Net Weight - 4.4kg, Overall Dim. - 315x355x110mm (wxdxh)

Model	Capacity	Readability	Pan Size
<b>CBC 4</b>	4kg	0.1g	225x275mm
<b>CBC 8</b>	8kg	0.2g	225x275mm
<b>CBC 16</b>	16kg	0.5g	225x275mm
<b>CBC 32</b>	32kg	1g	225x275mm
<b>CBC 48</b>	48kg	2g	225x275mm

## Approved Models EC Type Approved

Model	Capacity	Readability	Pan Size
<b>CBC 3M</b>	3kg	1g	225x275mm
<b>CBC 6M</b>	6kg	2g	225x275mm
<b>CBC 15M</b>	15kg	5g	225x275mm
<b>CBC 30M</b>	30kg	10g	225x275mm



## ACCESSORIES

Item number	Description
<b>30200001</b>	Hard carrying case with lock
302205006	In-use wet cover
700200057	In-use wet cover (pack of 5)
700200058	In-use wet cover (pack of 10)
<b>3074010266</b>	RS-232 cable (null-modem)
3074010507	RS-232 to USB adapter (must order corresponding RS-232 cable)
<b>1120011156</b>	ATP thermal printer
3126011263	ATP thermal printer paper
3126011281	ATP thermal printer paper (pack of 10)
600002028	Adam DU data collection program
700660290	Calibration certificate



30200001



3074010266



1120011156



## FEATURES

- Backlit LCD shows weight, unit weight and count in one convenient location
- Programmable backlight can be set to "always on," "always off" or "light only when weighing"
- Colour-coded keys facilitate quick recognition of the most frequently used buttons
- Level indicator and adjustable feet ensure proper balance setup for optimum weighing results
- Large, grade 304 stainless steel pan allows easy cleaning
- RS-232 interface for connection to computers and printers
- Optional USB interface simplifies data communication
- Overload protection helps prevent damage to internal components
- Rugged construction stands up to industrial use
- Supports connection to platforms with up to four load cells
- External calibration allows for verification and adjustment with weights
- Memory accumulation totals results
- Parts counting with freely selectable sample sizes
- Parts counting optimisation automatically refines piece weight as parts are added
- Preset tare function speeds the process of repetitive weighing
- Product Look Up (PLU) memory locations store up to 100 items for recall as needed
- Programmable for counting to a preset number of parts
- Quick and easy configuration using the keypad
- Security password control prevents unauthorised access
- Selectable digital filtering helps minimise effects of vibration and disturbances
- Zero-tracking feature ensures display returns to zero reading
- User can program alarm to sound when preset total is reached
- Rechargeable battery included for operation almost anywhere
- Programmable auto power-off to save energy

## Expedite complex, high-volume counting tasks

### GENERAL SPECIFICATIONS

- Weighing units: kg
- Interface: RS-232, Second scale port, Optional USB
- Power Supply: Mains power cord / Internal rechargeable battery
- Display: Backlit LCD with 20mm-high digits
- Calibration: External calibration
- Housing: ABS plastic / Stainless Steel Top Pan
- Operating Temperature: 0° to 40°C

Model	Capacity	Readability	Pan Size
<b>CBD 4</b>	4kg	0.1g	225x275mm
<b>CBD 8</b>	8kg	0.2g	225x275mm
<b>CBD 16</b>	16kg	0.5g	225x275mm
<b>CBD 32</b>	32kg	1g	225x275mm
<b>CBD 48</b>	48kg	2g	225x275mm



### APPLICATIONS

- Weighing
- Parts counting
- Check counting
- Accumulation of weight
- Dual scale operation

### WEIGHT AND DIMENSIONS

- Net Weight - 4.4kg, Overall Dim. - 315x355x110mm (wxdxh)

### ACCESSORIES

Item number	Description
<b>30200001</b>	Hard carrying case with lock
302205006	In-use cover
700200057	In-use cover (pack of 5)
700200058	In-use cover (pack of 10)
<b>1120011156</b>	ATP thermal printer
3126011263	ATP thermal printer paper
3126011281	ATP thermal printer paper (pack of 10)
<b>3074010266</b>	RS-232 cable (null-modem)
3074010507	RS-232 to USB adapter (must order corresponding RS-232 cable)
600002028	Adam DU data collection program
700660290	Calibration certificate





## FEATURES

- Backlit LCD shows weight, unit weight and count in one convenient location
- Programmable backlight can be set to “always on,” “always off” or “light only when weighing”
- Adjustable levelling feet help optimise setup
- Colour-coded keys facilitate quick recognition of the most frequently used buttons
- RS-232 interface for connection to computers and printers
- Rugged construction stands up to industrial use
- Splash-proof housing, keypad and display mean easy cleaning and peace of mind
- Audible overload alarm warns when capacity has been exceeded
- External calibration allows for verification and adjustment with weights
- Internal counting resolution 1:600,000 for precise results
- Parts counting with freely selectable sample sizes
- Parts counting optimisation automatically refines piece weight as parts are added
- Preset tare function speeds the process of repetitive weighing
- Printouts include date and time for data tracking within Good Laboratory Practices (GLP) guidelines
- Zero-tracking feature ensures display returns to zero reading
- User can program alarm to sound when preset total is reached
- Rechargeable battery included for operation almost anywhere
- Programmable auto power-off to save energy

## Exceptional durability for industrial counting needs

### GENERAL SPECIFICATIONS

- Weighing units: kg
- Interface: RS-232, Optional USB
- Power Supply: Mains power cord / Internal rechargeable battery
- Display: Backlit LCD with 20mm-high digits
- Calibration: External calibration
- Housing: Die-cast aluminum / stainless steel top pan
- Operating Temperature: -10° to 40°C

Model	Capacity	Readability	Pan Size
<b>GBC 16</b>	16kg	0.5g	300x400mm
<b>GBC 32</b>	32kg	1g	300x400mm
<b>GBC 60</b>	60kg	2g	300x400mm



### APPLICATIONS

- Weighing
- Parts counting
- Check counting

### WEIGHT AND DIMENSIONS

- Net Weight - 7.6kg, Overall Dim. - 300x520x680mm (wxdxh)

### ACCESSORIES

Item number	Description
3052010526	In-use cover
1120011156	ATP thermal printer
3126011263	ATP thermal printer paper
3126011281	ATP thermal printer paper (pack of 10)
3074010266	RS-232 cable (null-modem)
3074010507	RS-232 to USB adapter (must order corresponding RS-232 cable)
600002028	Adam DU data collection program
700660290	Calibration certificate



## FEATURES

- Backlit LCD shows weight, unit weight and count in one convenient location
- Programmable backlight can be set to “always on,” “always off” or “light only when weighing”
- Adjustable levelling feet help optimise setup
- Colour-coded keys facilitate quick recognition of the most frequently used buttons
- Large, grade 304 stainless steel pan allows easy cleaning
- RS-232 interface for connection to computers and printers
- Rugged construction stands up to industrial use
- Audible overload alarm warns when capacity has been exceeded
- External calibration allows for verification and adjustment with weights
- Internal counting resolution 1:600,000 for precise results
- Parts counting with freely selectable sample sizes
- Parts counting optimisation automatically refines piece weight as parts are added
- Preset tare function speeds the process of repetitive weighing
- Selectable digital filtering helps minimise effects of vibration and disturbances
- Zero-tracking feature ensures display returns to zero reading
- User can program alarm to sound when preset total is reached
- Rechargeable battery included for operation almost anywhere
- Programmable auto power-off to save energy

*GFC delivers the power and efficiency needed to count large quantities of oversized items*

## GENERAL SPECIFICATIONS

- Weighing units: kg
- Interface: RS-232, Optional USB
- Power Supply: Mains power cord / Internal rechargeable battery
- Display: Backlit LCD with 20mm-high digits
- Calibration: External calibration
- Housing: Die Cast Aluminium / Stainless Steel Top Pan
- Operating Temperature: -10° to 40°C

Model	Capacity	Readability	Pan Size
<b>GFC 75</b>	75kg	0.005kg	400x500mm
<b>GFC 150</b>	150kg	0.01kg	400x500mm
<b>GFC 300</b>	300kg	0.02kg	400x500mm



## APPLICATIONS

- Weighing
- Parts counting
- Check counting

## WEIGHT AND DIMENSIONS

- Net Weight - 12.5kg, Overall Dim. - 400x620x860mm (wxdxh)

## ACCESSORIES

Item number	Description
3052010526	In-use cover
1120011156	ATP thermal printer
3126011263	ATP thermal printer paper
3126011281	ATP thermal printer paper (pack of 10)
3074010266	RS-232 cable (null-modem)
3074010507	RS-232 to USB adapter (must order corresponding RS-232 cable)
600002028	Adam DU data collection program
700660290	Calibration certificate

# WASHDOWN SCALES



The Warrior is well-suited for food processing or production, making it ideal for washdown applications. Its grade 304 stainless steel base, top pan, pillar and indicator are IP66 rated, so the Warrior can be thoroughly washed during or after use. The oversized display is brightly illuminated and easy to read in any lighting conditions.

Designed for applications needing frequent washdown, WBW and WBW-M scales are available in a selection of capacities and readabilities. IP66-rated housing and stainless steel pan stand up to demanding industrial environments. Other features include checkweighing LED indicators, capacity tracker and overload indicator to protect against damage from excessive weight.

**Featured Product:**  
**Warrior® Washdown Scale**

# WARRIOR® WASHDOWN SCALES



## FEATURES

- Vivid, backlit LCD easily visible in any lighting conditions
- Programmable backlight can be set to "always on," "always off" or "light only when weighing"
- Capacity tracker built into display for easily monitoring possible overloads
- Checkweighing LEDs light to clearly show under, over and acceptable limits
- Colour-coded keys facilitate quick recognition of the most frequently used buttons
- Heavy-duty rubber feet ensure stability of unit
- Large, grade 304 stainless steel pan allows easy cleaning
- Overload protection helps prevent damage to internal components
- Rugged stainless steel construction for ultimate durability
- Sealed keypad protects against dirt and spills
- Simple key operation allows for easy set up and operation
- Checkweighing with audible alarm
- External calibration allows for verification and adjustment with weights
- Parts counting with preset sample sizes
- Selectable digital filtering for animal/dynamic weighing delivers stable results for moving subjects
- Selectable auto-clear function enables the last item to be reset each time the scale returns to zero
- Zero-tracking feature ensures display returns to zero reading
- IP66 rated for protection against water and dust
- Rechargeable battery included for operation almost anywhere
- Programmable auto power-off to save energy
- AC adapter included

*With strength, performance and intuitive features, the Warrior emerges victorious in washdown settings*

## GENERAL SPECIFICATIONS

- Weighing units: g, kg, lb, lb:oz, oz, N
- Interface: RS-232
- Power Supply: 12VDC 50/60Hz 800mA adapter / Internal rechargeable battery
- Display: Backlit LCD with 40mm-high digits
- Calibration: External calibration
- Housing: Stainless steel
- Operating Temperature: -10° to 40°C

## APPLICATIONS

- Weighing
- Parts counting
- Percentage weighing
- Checkweighing
- Dynamic / animal weighing

Model	Capacity	Readability	Pan Size
<b>WSK 8</b>	8kg	0.5g	250x250mm
<b>WSK 16</b>	16kg	1g	250x250mm
<b>WSK 32</b>	32kg	2g	250x250mm
<b>WBK 32</b>	32kg	2g	300x400mm
<b>WBK 32H</b>	32kg	1g	300x400mm
<b>WBK 75</b>	75kg	5g	300x400mm
<b>WFK 75</b>	75kg	5g	400x500mm
<b>WFK 75H</b>	75kg	1g	400x500mm
<b>WFK 150</b>	150kg	10g	400x500mm
<b>WLK 150</b>	150kg	10g	450x600mm



## WEIGHT AND DIMENSIONS

- **WSK 8, WSK 16, WSK 32:** Net Weight - 6kg, Overall Dim. - 250x345x532mm (wxdxh)
- **WBK 32, WBK 32H, WBK 75:** Net Weight - 9kg, Overall Dim. - 300x500x587mm (wxdxh)
- **WFK 75, WFK 75H, WFK 150:** Net Weight - 13kg, Overall Dim. - 400x590x972mm (wxdxh)
- **WLK 150:** Net Weight - 19kg, Overall Dim. - 450x700x972mm (wxdxh)

## ACCESSORIES

Item number	Description
3102311619	In-use cover
<b>1120011156</b>	ATP thermal printer
3126011263	ATP thermal printer paper
3126011281	ATP thermal printer paper (pack of 10)
3104012889	RS-232 cable (factory fitted)
<b>1100011297</b>	AE402 relay box
<b>600002028</b>	Adam DU data collection program
700660290	Calibration certificate



## FEATURES

- Vivid, backlit LCD easily visible in any lighting conditions
- Programmable backlight can be set to “always on,” “always off” or “light only when weighing”
- Capacity tracker built into display for easily monitoring possible overloads
- Checkweighing LEDs light to clearly show under, over and acceptable limits
- Adjustable levelling feet help optimise setup
- Colour-coded keys facilitate quick recognition of the most frequently used buttons
- Large, grade 304 stainless steel pan allows easy cleaning
- Lightweight design simplifies transport and portability
- Solid ABS housing is durable for industrial uses
- Overload protection helps prevent damage to internal components
- Audible overload alarm warns when capacity has been exceeded
- External calibration allows for verification and adjustment with weights
- Simple operation allows quick startup and use with little or no training
- Zero-tracking feature ensures display returns to zero reading
- IP66 rated for protection against water and dust
- Rechargeable battery included for operation almost anywhere
- Programmable auto power-off to save energy
- AC adapter included



## Checkweighing is a breeze with the WBW's colour indicators

### GENERAL SPECIFICATIONS

- Weighing units: g, kg, lb, lb:oz
- Power Supply: 12VDC 50/60Hz 800mA adapter / Internal rechargeable battery
- Display: Backlit LCD with 20mm-high digits
- Calibration: External calibration
- Housing: ABS plastic / Stainless Steel Top Pan
- Operating Temperature: -10° to 40°C

### APPLICATIONS

- Weighing
- Checkweighing

### WEIGHT AND DIMENSIONS

- Net Weight - 3.3kg, Overall Dim. - 231x265x153mm (wxdxh)

Model	Capacity	Readability	Pan Size
<b>WBW 2</b>	2kg	0.2g	210x173mm
<b>WBW 4</b>	4kg	0.5g	210x173mm
<b>WBW 8</b>	8kg	1g	210x173mm
<b>WBW 16</b>	16kg	2g	210x173mm

## Approved Models EC Type Approved

Model	Capacity	Readability	Pan Size
<b>WBW 3M</b>	3kg	1g	210x173mm
<b>WBW 6M</b>	6kg	2g	210x173mm
<b>WBW 15M</b>	15kg	5g	210x173mm



### ACCESSORIES

Item number	Description
2020010755	Rear Display (factory fitted)
303209190	In-use cover
303200002	In-use cover (pack of 10)
303200003	In-use cover (pack of 20)
<b>303147960</b>	Small scoop (complete with fitting to scales)
<b>303147961</b>	Medium scoop (complete with fitting to scales)
<b>303147959</b>	Large scoop (complete with fitting to scales)
700660290	Calibration certificate



**303147959 / 303147960 / 3031479601**

# RETAIL SCALES



A smart choice for catering, delis and bakeries that sell food based on weight, the WBZ washdown retail scale simplifies price computing. Weight, price per unit and total cost are visible to both operator and customer on WBZ's dual display. Easy to maintain, the WBZ has a streamlined design and fits neatly on crowded counters. It carries an IP66 rating and features NRCS and EC type approvals, making it suitable for trade use.

The AZextra retail scale offers weighing and price computing functions needed for meat counters, shops and markets. AZextra comes with internal memory capable of storing up to 103 product look-ups; the display shows price per kilogram or price per 100 grams. Time, date, weight, unit price and total cost transmit easily to printers. National Measurement Institute, NRCS and EC type approval means the AZextra can be used for trade.

Simple to use, Raven price computing scales offer 40 PLU memories that can be accessed directly from the keypad for quick recall of products. Large backlit displays on both the front and back of the scale, clearly show both the operator and customer the weight, unit price and total price. A customer-facing, pillar-mounted display can be added for additional visibility. The built-in, rechargeable battery makes the Raven ideal for applications such as selling at farmer's markets, where portability is a must.

The CCEU coin counting scale handles a large number of coins, providing accurate counts for nine different coins and two different token weights. The memory accumulates figures to show a total amount. Easy-to-use colour-coded keys speed up operation, while the large stainless steel platform accommodates a range of container sizes.

**Featured Product:  
WBZ Retail Scale**

## FEATURES

- Vivid, backlit LCD easily visible in any lighting conditions
- Backlit LCD shows weight, unit price and total price, to provide the key information simultaneously
- Rear display mounted on the back of the scale lets customers see key data
- Colour-coded keys facilitate quick recognition of the most frequently used buttons
- Heavy-duty rubber feet ensure stability of unit
- Large, grade 304 stainless steel pan allows easy cleaning
- Overload protection helps prevent damage to internal components
- Sealed keypad protects against dirt and accidental spills
- Solid ABS housing is durable for industrial uses
- External calibration allows for verification and adjustment with weights
- Preset tare function speeds the process of repetitive weighing
- Price displayed in choice of available currencies
- Security password control prevents unauthorised access
- Selectable auto-clear function enables the last item to be reset each time the scale returns to zero
- Switchable between price per kg and price per 100g
- Zero-tracking feature ensures display returns to zero reading
- IP66 rated for protection against water and dust
- AC adapter included
- Rechargeable battery included for operation almost anywhere
- Programmable auto power-off to save energy



*Portable and durable IP66-rated scale is a winner for price computing in retail locations*

## GENERAL SPECIFICATIONS

- Weighing units: kg
- Power Supply: 12VDC 50/60Hz 800mA adapter / Internal rechargeable battery
- Display: Backlit LCD with 16mm-high digits
- Calibration: External calibration
- Housing: ABS plastic / Stainless Steel Top Pan
- Operating Temperature: -10° to 40°C

Model	Capacity	Readability	Pan Size
<b>WBZ 3</b>	3kg	1g	210x173mm
<b>WBZ 6</b>	6kg	2g	210x173mm
<b>WBZ 15</b>	15kg	5g	210x173mm



## APPLICATIONS

- Weighing
- Price computing

## WEIGHT AND DIMENSIONS

- Net Weight - 3.3kg, Overall Dim. - 231x265x153mm (wxdxh)

## ACCESSORIES

Item number	Description
303209190	In-use cover
303200002	In-use cover (pack of 10)
303200003	In-use cover (pack of 20)
<b>303147960</b>	Small scoop (complete with fitting to scale)
<b>303147961</b>	Medium scoop (complete with fitting to scale)
<b>303147959</b>	Large scoop (complete with fitting to scale)
700660290	Calibration certificate



**303147959 / 303147960 / 3031479601**



## FEATURES

- Backlit LCD shows weight, unit price and total price, to provide the key information simultaneously
- Rear display mounted on a pillar or back of the scale lets customers see key data
- Adjustable levelling feet help optimise setup
- Colour-coded keys facilitate quick recognition of the most frequently used buttons
- Large, grade 304 stainless steel pan allows easy cleaning
- Lightweight design simplifies transport and portability
- RS-232 interface for connection to computers and printers
- Solid ABS housing is durable for industrial uses
- Audible overload alarm warns when capacity has been exceeded
- External calibration allows for verification and adjustment with weights
- Memory accumulation totals results
- Multilingual display allows use in many different countries
- Preset tare function speeds the process of repetitive weighing
- Product Look Up (PLU) memory locations store a range of items for recall as needed
- Selectable auto-clear function enables the last item to be reset each time the scale returns to zero
- Zero-tracking feature ensures display returns to zero reading
- EC type approved
- Rechargeable battery included for operation almost anywhere
- Programmable auto power-off to save energy

**Front and rear displays provide simultaneous customer and operator viewing**

## GENERAL SPECIFICATIONS

- Weighing units: kg
- Interface: RS-232
- Power Supply: Mains power cord / Internal rechargeable battery
- Display: Backlit LCD with 20mm-high digits
- Calibration: External calibration
- Housing: ABS plastic / Stainless Steel Top Pan
- Operating Temperature: -10° to 40°C

## APPLICATIONS

- Weighing
- Price computing

## WEIGHT AND DIMENSIONS

- **AZextra 3, AZextra 6, AZextra 15, AZextra 30:** Net Weight - 4.3kg, Overall Dim. - 315x355x110mm (wxdxh)
- **AZextra 3P, AZextra 6P, AZextra 15P, AZextra 30P:** Net Weight - 4.7kg, Overall Dim. - 315x355x535mm (wxdxh)

Model	Capacity	Readability	Pan Size
<b>AZextra 3</b>	3kg	1g	225x275mm
<b>AZextra 6</b>	6kg	2g	225x275mm
<b>AZextra 15</b>	15kg	5g	225x275mm
<b>AZextra 30</b>	30kg	10g	225x275mm
<b>AZextra 3P</b>	3kg	1g	225x275mm
<b>AZextra 6P</b>	6kg	2g	225x275mm
<b>AZextra 15P</b>	15kg	5g	225x275mm
<b>AZextra 30P</b>	30kg	10g	225x275mm

P Models include pillar



## ACCESSORIES

Item number	Description
302000001	Hard carrying case with lock
302205006	In-use cover
700200057	In-use cover (pack of 5)
700200058	In-use cover (pack of 10)
<b>1120011156</b>	ATP thermal printer
3126011263	ATP thermal printer paper
3126011281	ATP thermal printer paper (pack of 10)
3074010266	RS-232 cable (null-modem)
3074010507	RS-232 to USB adapter (must order corresponding RS-232 cable)
<b>303149761</b>	Fish Scoop (complete with fitting to scale)
<b>303149759</b>	Vegetable Scoop (complete with fitting to scale)
<b>303149760</b>	Confectionery Scoop (complete with fitting to scale)
600002028	Adam DU data collection program
700660290	Calibration certificate



**1120011156**



**303147959 / 303147960 / 3031479601**



## FEATURES

- Backlit LCD shows weight, unit price and total price, to provide the key information simultaneously
- Rear display mounted on the back of the scale lets customers see key data
- Adjustable levelling feet help optimise setup
- Colour-coded keys facilitate quick recognition of the most frequently used buttons
- Lightweight design simplifies transport and portability
- Large, grade 304 stainless steel pan allows easy cleaning
- Overload protection helps prevent damage to internal components
- Solid ABS housing is durable for industrial uses
- Product Look Up (PLU) memory locations store a range of items for recall as needed
- Quick and easy configuration using the keypad
- The auto power-off feature conserves battery life
- Auto-clear function
- Preset tare function speeds the process of repetitive weighing
- EC type and OIML approved
- AC adapter included
- Programmable auto power-off to save energy
- Rechargeable battery included for operation almost anywhere

*Raven offers price computing and weighing functions, in a small footprint scale*

## GENERAL SPECIFICATIONS

- Weighing units: kg
- Power Supply: 12VDC 50/60Hz 1A adapter / Internal rechargeable battery
- Display: Backlit LCD with 18mm-high digits
- Calibration: External calibration
- Housing: ABS plastic / stainless steel top pan
- Operating Temperature: -10° to 40°C

Model	Capacity	Readability	Pan Size
<b>RAV 3D</b>	1.5kg / 3kg	0.5g / 1g	220x310mm
<b>RAV 6D</b>	3kg / 6kg	1g / 2g	220x310mm
<b>RAV 15D</b>	6kg / 15kg	2g / 5g	220x310mm
<b>RAV 30D</b>	15kg / 30kg	5g / 10g	220x310mm



## APPLICATIONS

- Weighing
- Price computing

## WEIGHT AND DIMENSIONS

- Net Weight - 3.85kg, Overall Dim. - 330x335x115mm (wxdxh)



Rear View

## ACCESSORIES

Item number	Description
302000001	Hard carrying case with lock
302205006	In-use cover
700200057	In-use cover (pack of 5)
700200058	In-use cover (pack of 10)
<b>1120011156</b>	ATP thermal printer
3126011263	ATP thermal printer paper
3126011281	ATP thermal printer paper (pack of 10)
3074010266	RS-232 cable (null-modem)
3074010507	RS-232 to USB adapter (must order corresponding RS-232 cable)
<b>303149761</b>	Fish Scoop (complete with fitting to scale)
<b>303149759</b>	Vegetable Scoop (complete with fitting to scale)
<b>303149760</b>	Confectionery Scoop (complete with fitting to scale)
600002028	Adam DU data collection program
700660290	Calibration certificate



1120011156



303149759 / 303149760 / 3031497601

## FEATURES

- Vivid, backlit LCD easily visible in any lighting conditions
- Security password control
- Memory accumulation totals coin values
- Accommodates nine different coin units and two different token sizes
- Adjustable levelling feet help optimise setup
- Colour-coded keys facilitate quick recognition of the most frequently used buttons
- Large, grade 304 stainless steel pan allows easy cleaning
- Lightweight design simplifies transport and portability
- RS-232 interface for connection to computers and printers
- Audible overload alarm warns when capacity has been exceeded
- External calibration allows for verification and adjustment with weights
- Zero-tracking feature ensures display returns to zero reading
- Rechargeable battery included for operation almost anywhere
- Programmable auto power-off to save energy
- Counts Euros or sterling coins, but can be configured for other currencies as well



## Dependable and efficient coin counting, providing quality assurance

### GENERAL SPECIFICATIONS

- Weighing units: kg, PCS
- Interface: RS-232, Optional USB
- Power Supply: Mains power cord / Internal rechargeable battery
- Display: Backlit LCD with 20mm-high digits
- Calibration: External calibration
- Housing: ABS plastic / Stainless Steel Top Pan
- Operating Temperature: 0° to 40°C

Model	Capacity	Readability	Pan Size
CCEU 20	20kg	1g	225x275mm



### APPLICATIONS

- Coin counting
- Weighing

### WEIGHT AND DIMENSIONS

- Net Weight - 4.4kg, Overall Dim. - 315x355x110mm (wxdxh)

### ACCESSORIES

Item number	Description
<b>30200001</b>	Hard carrying case with lock
302205006	In-use cover
700200057	In-use cover (pack of 5)
700200058	In-use cover (pack of 10)
<b>1120011156</b>	ATP thermal printer
3126011263	ATP thermal printer paper
3126011281	ATP thermal printer paper (pack of 10)
<b>3074010266</b>	RS-232 cable (null-modem)
3074010507	RS-232 to USB adapter (must order corresponding RS-232 cable)
700660290	Calibration certificate



30200001



3074010266



1120011156



Adam's industrial hanging scales provide manufacturing operations with a solution to safely measure suspended loads. IHS features robust die-cast metal housing and a rotating plated steel hook with oversized shackle to help manoeuvre loads indoors or outdoors up to 10,000kg. The remote control enables operation from a safe location, and the LED is highly visible from a distance. A hold / peak hold function keeps the results on the display for easier operation.

Adam's industrial hanging scales provide manufacturing operations with a solution to safely measure suspended loads. LHS features cast aluminum magnesium housing and a rotating chrome-plated steel hook and swivel shackle to help the operator easily manoeuvre loads up to 2,000kg. The remote control enables operation from a safe location, and the LED is highly visible from a distance. A hold / peak hold function keeps the results on the display for easier operation.

Adam's industrial hanging scales provide manufacturing operations with a solution to safely measure suspended loads. SHS features sturdy polycarbonate housing and a rotating chrome-plated steel hook and swivel shackle to help the operator easily manoeuvre loads up to 300kg. The remote control enables operation from a safe location, and the LED is highly visible from a distance. A hold / peak hold function keeps the results on the display for easier operation.

**Featured Product:**  
LHS Crane Scale



## FEATURES

- Bright LED display for easy viewing in most environments
- Rotating hook allows easy access while loading, then safely locks in place during weighing
- Lightweight design simplifies transport and portability
- Rugged construction stands up to industrial use
- Remote control allows safe, hands-free operation
- External calibration allows for verification and adjustment with weights
- Hold function freezes the displayed weight, allowing time to lapse without losing the result
- Zero-tracking feature ensures display returns to zero reading
- Programmable auto power-off to save energy

## Bringing strength and safety to the forefront of industrial settings

### GENERAL SPECIFICATIONS

- Weighing units: kg, lb, N
- Power Supply: AC adapter / 4 x AA batteries / Internal rechargeable battery
- Display: LED with 15mm-high digits
- Calibration: External calibration
- Housing: Polycarbonate
- Operating Temperature: 0° to 40°C

Model	Capacity	Readability
<b>SHS 50</b>	50kg	0.01kg
<b>SHS 150</b>	150kg	0.02kg
<b>SHS 300</b>	300kg	0.05kg



### APPLICATIONS

- Weighing

### WEIGHT AND DIMENSIONS

- Net Weight - 1.2kg, Overall Dim. - 146x65x320mm (wxdxh)

Adam Equipment Co. Ltd., its directors, staff, owners and affiliated companies and organisations cannot be held liable for any resulting damage or injury sustained as a result of the machines being used in excess of their capacities and ultimate overload limits.

### ACCESSORIES

Item number	Description
700660290	Calibration certificate



## FEATURES

- Bright LED display for easy viewing in most environments
- Rotating hook allows easy access while loading, then safely locks in place during weighing
- Lightweight design simplifies transport and portability
- Remote control allows safe, hands-free operation
- Rugged construction stands up to industrial use
- External calibration allows for verification and adjustment with weights
- Hold function freezes the displayed weight, allowing time to lapse without losing the result
- Zero-tracking feature ensures display returns to zero reading
- Programmable auto power-off to save energy

*Suitable for weighing moderate loads, LHS delivers durability in a hanging scale*

## GENERAL SPECIFICATIONS

- Weighing units: kg, lb, N
- Power Supply: AC adapter / Internal rechargeable battery
- Display: LED with 25mm-high digits
- Calibration: External calibration
- Housing: Die-cast aluminum
- Operating Temperature: 0° to 40°C

Model	Capacity	Readability
<b>LHS 500</b>	500kg	0.1kg
<b>LHS 1500</b>	1500kg	0.2kg
<b>LHS 2000</b>	2000kg	0.5kg



## APPLICATIONS

- Weighing

## WEIGHT AND DIMENSIONS

- Net Weight - 4.8kg, Overall Dim. - 195x130x450mm (wxdxh)

Adam Equipment Co. Ltd., its directors, staff, owners and affiliated companies and organisations cannot be held liable for any resulting damage or injury sustained as a result of the machines being used in excess of their capacities and ultimate overload limits.

## ACCESSORIES

Item number	Description
700660288	Calibration certificate (IHS, LHS, AFK 600, GFK 600, PTM)



## FEATURES

- Bright LED display for easy viewing in most environments
- Rotating hook allows easy access while loading, then safely locks in place during weighing
- Remote control allows safe, hands-free operation
- Sealed keypad protects against dirt and accidental spills
- Solid metal housing resists spills and protects internal components
- Auto power-off to save energy
- Rechargeable battery included for operation almost anywhere
- AC adapter included

*When strength and safety are essential, IHS is the overwhelming winner to weigh suspended loads*

## GENERAL SPECIFICATIONS

- Weighing units: kg
- Power Supply: 7.2VDC 50/60Hz 2A adapter / Internal rechargeable battery
- Display: LED with 30mm-high digits
- Calibration: External calibration
- Housing: Die-cast aluminum
- Operating Temperature: 0° to 40°C

Model	Capacity	Readability
IHS 1	1000kg	0.2kg
IHS 3	3000kg	0.5kg
IHS 5	5000kg	1kg
IHS 10	10000kg	2kg



## APPLICATIONS

- Weighing

## WEIGHT AND DIMENSIONS

- IHS 1: Net Weight - 12kg, Overall Dim. - 255x190x550mm (wxdxh)
- IHS 3: Net Weight - 14kg, Overall Dim. - 255x190x550mm (wxdxh)
- IHS 5: Net Weight - 19kg, Overall Dim. - 255x190x650mm (wxdxh)
- IHS 10: Net Weight - 31kg, Overall Dim. - 255x190x750mm (wxdxh)

Adam Equipment Co. Ltd., its directors, staff, owners and affiliated companies and organisations cannot be held liable for any resulting damage or injury sustained as a result of the machines being used in excess of their capacities and ultimate overload limits.

## ACCESSORIES

Item number	Description
700660288	Calibration certificate (IHS, LHS, AFK 600, GFK 600, PTM)

# HEAVY DUTY SCALES




**Featured Product:**  
**PTS Pallet Scale**

AELP pallet beams are ideal for weighing pallets and other oversized items. The AELP is simple to operate and easy to move, with built-in wheels and handles for mobility. Pair the AELP with the GK indicator for a range of different features. The AELP is equipped with five meters of shielded cable, allowing the indicator and beams to be ideally positioned.

The PTM low-profile platform is ideal for weighing barrels, wheelchairs, drums and other oversized containers. Easy-access ramps on both sides offer smooth transitions from the floor to the weighing platform and the diamond checkered-plate surface offers a steady, solid weighing area. Handles and wheels allow the PTM to be moved easily.

Compatible with several Adam indicators, PT platform is designed for weighing pallets, crates and large containers in warehouses or on loading docks. PT features a low-profile design for easy access and a diamond-plate surface for better traction, while optional ramps facilitate loading and unloading. PT is available in several models, including a stainless steel version.

The PTS offers an easy and cost-efficient way to manage, move and weigh heavy loads. Reinforced steel pallet forks are generously sized and provide durable lifting capabilities. A zero-radius pivoting handle provides exceptional maneuverability in tight spots, while non-marring polyurethane wheels ensure floors stay clean and unmarked.

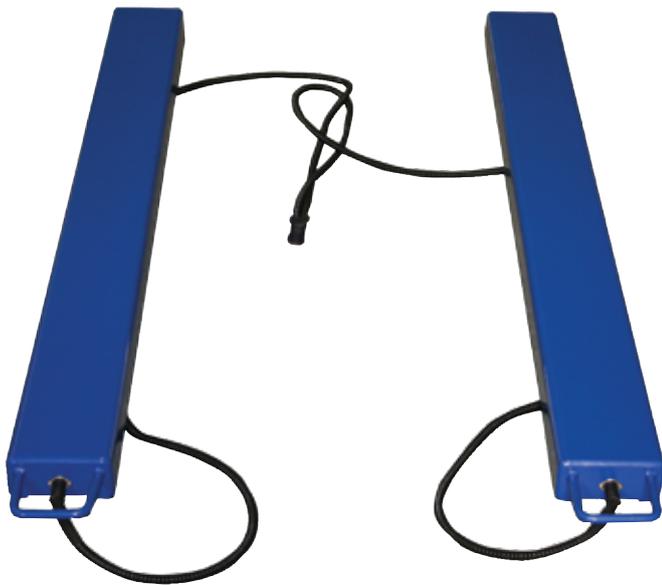

## FEATURES

- Low-profile beams allow easy pallet weighing using pallet trucks
- Approximately five meter of shielded cable
- Heavy-duty rubber feet ensure stability of unit
- Integrated wheels permit easy movement
- Can be used with one of several Adam indicators
- Two beams per set
- OIML-approved load cells

*Low-profile beams facilitate safe, secure weighing for loaded pallets*

## GENERAL SPECIFICATIONS

- Housing: Mild steel base
- Operating Temperature: -10° to 40°C

## APPLICATIONS

- Weighing
- Parts counting
- Percentage weighing
- Checkweighing
- Check counting
- Dynamic / animal weighing

## WEIGHT AND DIMENSIONS (Beams only)

- Net Weight - 34kg, Overall Dim. - 120x1330x85mm (wxdxh)

Model	Capacity	Readability	Pan Size
<b>AELP 1000</b>	1000kg	0.2kg	120x1250mm
<b>AELP 1000 [GK]</b>	1000kg	0.2kg	120x1250mm
<b>AELP 2000</b>	2000kg	0.5kg	120x1250mm
<b>AELP 2000 [GK]</b>	2000kg	0.5kg	120x1250mm



**GK Indicator**

## ACCESSORIES

Item number	Description
3052010526	In-use cover
1120011156	ATP thermal printer
3126011263	ATP thermal printer paper
3126011281	ATP thermal printer paper (pack of 10)
3074010266	RS-232 cable (null-modem)
3074010507	RS-232 to USB adapter (must order corresponding RS-232 cable)
600002028	Adam DU data collection program
700660289	Calibration certificate



## FEATURES

- Adjustable levelling feet help optimise setup
- Built-in ramps on each side enable easy access
- Chequered plate surface for added grip
- Heavy-duty rubber feet ensure stability of unit
- Integrated wheels permit easy movement
- Three-meter load cell cable
- Rugged construction stands up to industrial use

*Low-profile base and easy-access ramps for warehouses or medical use*

## GENERAL SPECIFICATIONS

- Housing: Mild steel base
- Operating Temperature: -10° to 40°C

Model	Capacity	Readability	Pan Size
<b>PTM 500</b>	500kg	0.1kg	760x580mm
<b>PTM 500 [GK]</b>	500kg	0.1kg	760x580mm



## APPLICATIONS

- Weighing
- Parts counting
- Percentage weighing
- Checkweighing
- Dynamic / animal weighing

## WEIGHT AND DIMENSIONS (PTM500 only)


- Net Weight - 35.5kg, Overall Dim. - 1020x803x75mm (wxdxh)



**GK Indicator**

## ACCESSORIES

Item number	Description
1120011156	ATP thermal printer
3126011263	ATP thermal printer paper
3126011281	ATP thermal printer paper (pack of 10)
3074010266	RS-232 cable (null-modem)
700400103	RS-232 cable
3074010507	RS-232 to USB adapter (must order corresponding RS-232 cable)
600002028	Adam DU data collection program
700660288	Calibration certificate (IHS, LHS, AFK 600, GFK 600, PTM)

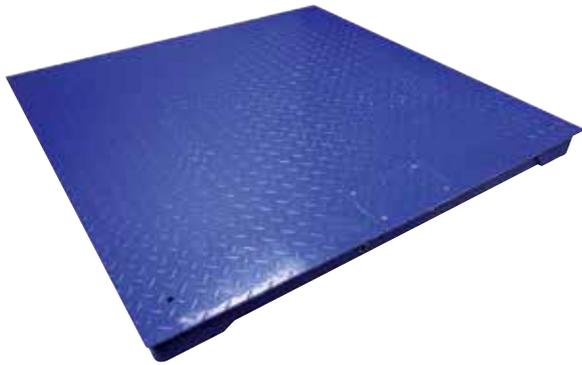

## FEATURES

- Rugged construction stands up to industrial use
- Chequered plate surface for added grip
- Approximately three meter shielded cable
- Optional ramps facilitate loading and unloading
- Can be used with one of several Adam indicators

*Quality construction with diamond-plate surface for ultimate durability and performance*

## GENERAL SPECIFICATIONS

- Housing: Mild steel base
- Operating Temperature: -10° to 40°C

## APPLICATIONS

- Weighing
- Parts counting
- Checkweighing
- Dynamic / animal weighing

## WEIGHT AND DIMENSIONS

- **PT 110, PT 310:** Net Weight - 62kg, Overall Dim.- 1000x1000x110mm (wxdxh)
- **PT 112, PT 312:** Net Weight - 79kg, Overall Dim.- 1200x1200x110mm (wxdxh)
- **PT 115, PT 315:** Net Weight - 111kg, Overall Dim.- 1500x1500x110mm (wxdxh)



GK Indicator



GK M Indicator

Model	Capacity	Readability	Pan Size
PT 110	1000kg	0.2kg	1000x1000mm
PT 112	1000kg	0.2kg	1200x1200mm
PT 115	1000kg	0.2kg	1500x1500mm
PT 310	3000kg	0.5kg	1000x1000mm
PT 312	3000kg	0.5kg	1200x1200mm
PT 315	3000kg	0.5kg	1500x1500mm

## Models with GK indicator

Model	Capacity	Readability	Pan Size
PT 110 [GK]	1000kg	0.2kg	1000x1000mm
PT 112 [GK]	1000kg	0.2kg	1200x1200mm
PT 115 [GK]	1000kg	0.2kg	1500x1500mm
PT 310 [GK]	3000kg	0.5kg	1000x1000mm
PT 312 [GK]	3000kg	0.5kg	1200x1200mm
PT 315 [GK]	3000kg	0.5kg	1500x1500mm


## Approved Models EC Type Approved

Model	Capacity	Readability	Pan Size
PT 110 [GK M]	1500kg	0.5kg	1000x1000mm
PT 112 [GK M]	1500kg	0.5kg	1200x1200mm
PT 115 [GK M]	1500kg	0.5kg	1500x1500mm
PT 310 [GK M]	3000kg	1kg	1000x1000mm
PT 312 [GK M]	3000kg	1kg	1200x1200mm
PT 315 [GK M]	3000kg	1kg	1500x1500mm



## ACCESSORIES

Item number	Description
3052010526	In-use cover
1120011156	ATP thermal printer
3126011263	ATP thermal printer paper
3126011281	ATP thermal printer paper (pack of 10)
3074010266	RS-232 cable (null-modem)
3074010507	RS-232 to USB adapter (must order corresponding RS-232 cable)
700100200	Mild Steel Ramp - PT 12R 1200mm wide
700100201	Mild Steel Ramp - PT 15R 1500mm wide
700100199	Mild Steel Ramp - PT 10R 1000mm wide
700660289	Calibration certificate

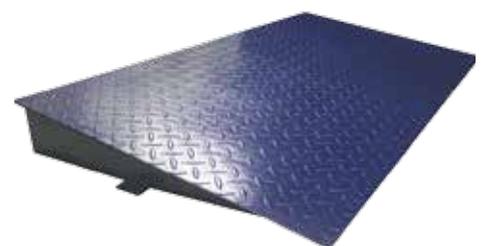

700100200



## FEATURES

- Vivid, backlit LCD easily visible in any lighting conditions
- Programmable backlight can be set to “always on,” “always off” or “light only when weighing”
- Capacity tracker built into display for easily monitoring possible overloads
- Checkweighing LEDs light to clearly show under, over and acceptable limits
- Solid non-marring polyurethane wheels
- Colour-coded keys facilitate quick recognition of the most frequently used buttons
- RS-232 interface for connection to computers and printers
- Splash-proof housing, keypad and display mean easy cleaning
- Wheels swivel, allowing easy movement
- Audible overload alarm warns when capacity has been exceeded
- Checkweighing with audible alarm
- External calibration allows for verification and adjustment with weights
- Parts counting with preset sample sizes
- Auto-clear function enables the last item to be reset each time the scale returns to zero
- Selectable digital filtering for animal/dynamic weighing delivers stable results for moving subjects
- Zero-tracking feature ensures display returns to zero reading
- Rechargeable battery included for operation almost anywhere
- Programmable auto power-off to save energy
- AC adapter included

*Speed up warehouse operations and reduce transportation overcharges with the PTS*

## GENERAL SPECIFICATIONS

- Weighing units: kg, lb, lb:oz, oz, N
- Interface: RS-232
- Power Supply: 12VDC 50/60Hz 800mA adapter / Internal rechargeable battery
- Display: Backlit LCD with 40mm-high digits
- Calibration: External calibration
- Housing: Mild steel base
- Operating Temperature: -10° to 40°C

Model	Capacity	Readability	Pan Size
PTS 2000	2000kg	0.5kg	160x1150mm



## APPLICATIONS

- Weighing
- Parts counting
- Percentage weighing
- Checkweighing
- Dynamic / animal weighing

## WEIGHT AND DIMENSIONS

- Net Weight - 125kg, Overall Dim. - 550x1525x1175mm (wxdxh)

## ACCESSORIES

Item number	Description
3102311619	In-use cover
1120011156	ATP thermal printer
3126011263	ATP thermal printer paper
3126011281	ATP thermal printer paper (pack of 10)
700400103	RS-232 cable
3074010507	RS-232 to USB adapter (must order corresponding RS-232 cable)
600002028	Adam DU data collection program
700660289	Calibration certificate



## Featured Product: AE402 Indicator

The AE402 boasts washdown capabilities and is well-suited for food processing plants or shipping and receiving areas. The sealed stainless steel housing is IP66 rated, so it can be hosed down or pressure-washed after use. A large LCD offers 40mm-high digits that are easily viewed under any lighting conditions, reducing user error.

The GK provides a full numeric keypad, allowing users to preset tare values for repetitive weighing of identical containers. A capacity tracker shows how much weighing range remains. Coloured LEDs speed up checkweighing, indicating if the weight is over, under or within a specified range.

With a wide range of features, the GC is ideal for parts counting tasks. Its numeric keypad facilitates unit weight and sample entry, while a large backlit display shows unit weight, total weight and number of pieces. The GC accumulates count totals and alerts the user when a predetermined count is reached.



## FEATURES

- Vivid, backlit LCD easily visible in any lighting conditions
- Capacity tracker built into display for easily monitoring possible overloads
- Colour-coded keys facilitate quick recognition of the most frequently used buttons
- Robust metal housing protects internal components in harsh environments
- Rugged construction stands up to industrial use
- RS-232 interface for connection to computers and printers
- Wall-mount bracket for placing indicator on vertical surface
- Checkweighing with audible alarm
- External calibration allows for verification and adjustment with weights
- Hold function freezes the displayed weight, allowing time to lapse without losing the result
- Parts counting with preset sample sizes
- Quick and easy configuration using the keypad
- Selectable digital filtering for animal/dynamic weighing delivers stable results for moving subjects
- User-selectable scale division
- Zero-tracking feature ensures display returns to zero reading
- IP66-rated for protection against water and dust
- AC adapter included
- Rechargeable battery included for operation almost anywhere
- Programmable auto power-off to save energy

## Multi-function washdown indicator for demanding environments

### GENERAL SPECIFICATIONS

- Weighing units: g, kg, lb, lb:oz, oz, N
- Interface: RS-232
- Power Supply: 12VDC 50/60Hz 800mA adapter / Internal rechargeable battery
- Display: Backlit LCD with 40mm-high digits
- Calibration: External calibration
- Housing: Stainless steel
- Operating Temperature: 0° to 40°C

Model	Capacity Range	Resolution
<b>AE 402</b>	Selectable	1:80,000



### APPLICATIONS

- Weighing
- Parts counting
- Percentage weighing
- Checkweighing
- Dynamic / animal weighing

### WEIGHT AND DIMENSIONS

- AE 402: Net Weight - 2kg, Overall Dim. - 240x145x95mm (wxdxh)

### ACCESSORIES

Item number	Description
3102311619	In-use cover
<b>1120011156</b>	ATP thermal printer
3126011263	ATP thermal printer paper
3126011281	ATP thermal printer paper (pack of 10)
700400103	RS-232 cable
3074010507	RS-232 to USB adapter (must order corresponding RS-232 cable)
<b>1100011297</b>	AE402 relay box
600002028	Adam DU data collection program



**1120011156**



**1100011297**



## FEATURES

- Vivid, backlit LCD easily visible in any lighting conditions
- Programmable backlight can be set to "always on," "always off" or "light only when weighing"
- Capacity tracker built into display for easily monitoring possible overloads
- Colour-coded keys facilitate quick recognition of the most frequently used buttons
- RS-232 interface for connection to computers and printers
- Solid ABS housing is durable for industrial uses
- Splash-proof housing, keypad and display mean easy cleaning and peace of mind
- Wall-mount bracket for placing indicator on vertical surface
- Checkweighing with audible alarm
- External calibration allows for verification and adjustment with weights
- Parts counting with freely selectable sample sizes
- Parts counting optimisation automatically refines piece weight as parts are added
- Preset tare function speeds the process of repetitive weighing
- Printouts include date and time for data tracking within Good Laboratory Practices (GLP) guidelines
- Programmable capacity and readability for a variety of applications
- Quick and easy configuration using the keypad
- Selectable digital filtering for animal/dynamic weighing delivers stable results for moving subjects
- Zero-tracking feature ensures display returns to zero reading
- Rechargeable battery included for operation almost anywhere
- Programmable auto power-off to save energy

## Weighing and counting tasks accomplished with simple versatility

### GENERAL SPECIFICATIONS

- Capacity: Selectable
- Weighing units: g, kg
- Interface: RS-232, Optional USB
- Power Supply: Mains power cord / Internal rechargeable battery
- Display: Backlit LCD with capacity tracker with 20mm-high digits
- Calibration: External calibration
- Housing: ABS plastic
- Operating Temperature: -10° to 40°C

Model	Capacity Range	Resolution
GK	Selectable	1:80,000

### Approved Models EC Type Approved

Model	Capacity Range	Resolution
GK M	Selectable	1:3,000



### APPLICATIONS

- Weighing
- Parts counting
- Percentage weighing
- Checkweighing
- Check counting
- Dynamic / animal weighing

### WEIGHT AND DIMENSIONS

- Net Weight - 2kg, Overall Dim. - 260x170x115mm (wxdxh)

### ACCESSORIES

Item number	Description
3052010526	In-use cover
305200001	In-use cover (pack of 5)
305200002	In-use cover (pack of 10)
<b>1120011156</b>	ATP thermal printer
3126011263	ATP thermal printer paper
3126011281	ATP thermal printer paper (pack of 10)
3074010266	RS-232 cable (null-modem)
3074010507	RS-232 to USB adapter (must order corresponding RS-232 cable)
600002028	Adam DU data collection program



**1120011156**



## FEATURES

- Backlit LCD shows weight, unit weight and count in one convenient location
- Colour-coded keys facilitate quick recognition of the most frequently used buttons
- Lightweight design simplifies transport and portability
- RS-232 interface for connection to computers and printers
- Solid ABS housing is durable for industrial uses
- Wall-mount bracket for placing indicator on vertical surface
- Audible overload alarm warns when capacity has been exceeded
- Internal counting resolution 1:600,000 for precise results
- Parts counting with freely selectable sample sizes
- Parts counting optimisation automatically refines piece weight as parts are added
- Preset tare function speeds the process of repetitive weighing
- Printouts include date and time for data tracking within Good Laboratory Practices (GLP) guidelines
- Selectable digital filtering helps minimise effects of vibration and disturbances
- Zero-tracking feature ensures display returns to zero reading
- User can program alarm to sound when preset total is reached
- Rechargeable battery included for operation almost anywhere
- Programmable auto power-off to save energy

## Fundamental weighing and counting in a multi-functional indicator

### GENERAL SPECIFICATIONS

- Capacity: Selectable
- Weighing units: g, kg
- Interface: RS-232
- Power Supply: Power Cord / Internal rechargeable battery
- Display: Backlit LCD with 20mm-high digits
- Calibration: External calibration
- Housing: ABS plastic
- Operating Temperature: -10° to 40°C

Model	Capacity Range	Resolution
GC	Selectable	1:80,000



### APPLICATIONS

- Weighing
- Parts counting
- Check counting

### WEIGHT AND DIMENSIONS

- GC: Net Weight - 2kg, Overall Dim .- 260x170x115mm (wxdxh)

### ACCESSORIES

Item number	Description
3052010526	In-use cover
305200001	In-use cover (pack of 5)
305200002	In-use cover (pack of 10)
<b>1120011156</b>	ATP thermal printer
3126011263	ATP thermal printer paper
3126011281	ATP thermal printer paper (pack of 10)
3074010266	RS-232 cable (null-modem)
3074010507	RS-232 to USB adapter (must order corresponding RS-232 cable)
600002028	Adam DU data collection program



1120011156

# HEALTH AND FITNESS SCALES



Lightweight and portable, the MTB offers versatility for pediatricians and other healthcare providers. The cleverly designed ergonomic cradle provides comfortable support for babies, and removes easily to reveal a non-slip rubber mat underneath to weigh toddlers. A memory feature retains the last weight taken, allowing focus to remain on the child.

Rugged and affordable, MDW scales are ideal for healthcare or fitness facilities. All MDW scales feature adjustable height rods for precise readings. MDW 300L is digital and calculates BMI, with wheels for mobility. MDW 250L is digital with built-in battery. MDW 160M is mechanical with wheels and notched counter weight.

The elegant and durable MUW 300L ultrasonic scale calculates height, weight and BMI (body mass index). This scale simplifies data collection and outputs patient and physician identification information without breaching confidentiality. The backlit LCD shows height, weight and BMI on one screen, eliminating the need to scroll through readings.

The MCW 300L chair scale from Adam Equipment provides an affordable and practical solution to address the challenge of weighing patients with limited mobility. The MCW combines sturdy construction with functionality, minimizing the difficulty of lifting patients and eliminating the need to move heavy health scales. Weight is measured in kilograms or pounds and the MCW 300L can calculate body mass index (BMI).



## FEATURES

- High-contrast display is easily visible from a distance
- Memory feature can recall the last weight taken, allowing the user to focus on the child
- Cradle can be removed to weigh toddlers on the non-slip rubber mat
- Ergonomic cradle provides comfortable support
- Lightweight design simplifies transport and portability
- Auto power-off to save energy
- External calibration allows for verification and adjustment with weights
- Simple operation allows quick startup and use with little or no training
- Operates with AC adapter (included) or batteries (not included)
- Ruler for measuring length of baby

## Offering the flexibility to weigh newborns and toddlers on the same scale

### GENERAL SPECIFICATIONS

- Weighing units: kg, lb, lb:oz
- Interface: N/A
- Power Supply: 6VDC 500mA adapter / 4 x AA batteries
- Display: LCD with 29mm-high digits
- Calibration: External calibration
- Housing: ABS plastic
- Operating Temperature: 10° to 40°C

Model	Capacity	Readability	Pan Size
MTB 20	20kg	5g	285x560mm



### APPLICATIONS

- Weighing

### WEIGHT AND DIMENSIONS

- MTB 20: Net Weight - 3.2kg, Overall Dim. - 560x350x140mm (wxdxh)

### ACCESSORIES

Item number	Description
700660290	Calibration certificate



## FEATURES

- BMI (body mass index) function available on the MDW 300L
- The MDW 300L offers RS-232 interface for fast communication with printers and computers
- MDW 250L and 300L feature a hold function to retain the weight on the display
- Use the MDW 250L and 300L with the included AC adapter or rechargeable battery
- Height measurements from 60cm to 212cm
- Anti-slip platform ensures safety stepping on and off the scale
- Integrated wheels permit easy movement (MDW300L only)
- Height rod facilitates measuring the height of children and adults while weighing
- Tare bar included with MDW200M only

*Affordable, easy-to-operate scale measures height and weight*

## GENERAL SPECIFICATIONS

- Weighing units: kg, lb (L models only)
- Display: Graduated beam (M models only)
- Calibration: External calibration
- Operating Temperature: 5° to 40°C
- Power Supply: 15VDC 50/60Hz 500mA adapter / Internal rechargeable battery (L models only)
- Display: LED with 22mm-high digits (L models only)
- Interface: RS-232 (MDW300L only)

Model	Capacity	Readability	Pan Size
<b>MDW 160M</b>	160kg	0.1kg	375x275mm
<b>MDW 200M</b>	200kg	0.1kg	375x275mm
<b>MDW 250L</b>	250kg	0.1kg	375x275mm
<b>MDW 300L</b>	300kg	0.05kg	375x275mm



## APPLICATIONS

- Weighing

## WEIGHT AND DIMENSIONS

- **MDW 160M:** Net Weight - 15kg, Overall Dim. - 530x275x1485mm (wxdxh)
- **MDW 200M:** Net Weight - 15kg, Overall Dim. - 530x275x1485mm (wxdxh)
- **MDW 250L:** Net Weight - 15kg, Overall Dim. - 530x275x1485mm (wxdxh)
- **MDW 300L:** Net Weight - 13kg, Overall Dim. - 570x275x1310mm (wxdxh)

## ACCESSORIES for MDW300L only

Item number	Description
1120011156	ATP thermal printer
3126011263	ATP thermal printer paper
3126011281	ATP thermal printer paper (pack of 10)
3014011014	RS-232 cable
3074010507	RS-232 to USB adapter (must order corresponding RS-232 cable)
600002028	Adam DU data collection program
700660290	Calibration certificate



## FEATURES

- Vivid, backlit LCD easily visible in any lighting conditions
- Automatic height calculation using ultrasonic sensors for precision measurements
- Printout can include a patient and doctor ID, as well as BMI measurements
- Height reading can be switched from centimeters to inches
- Ultrasonic height measurements from 80cm-210cm
- Anti-slip platform ensures safety stepping on and off the scale
- Colour-coded keys facilitate quick recognition of the most frequently used buttons
- Integrated wheels permit easy movement
- RS-232 interface for connection to computers and printers
- BMI (body mass index) indicator
- External calibration allows for verification and adjustment with weights
- AC adapter included
- Rechargeable battery included for operation almost anywhere

*Elegant ultrasonic scale effortlessly calculates height, weight and BMI*

## GENERAL SPECIFICATIONS

- Weighing units: kg, lb, lb:oz
- Interface: RS-232
- Power Supply: 12VDC 50/60Hz 800mA adapter / Internal rechargeable battery
- Display: Backlit LCD with 17mm-high digits
- Calibration: External calibration
- Housing: Mild steel base
- Operating Temperature: 0° to 40°C

Model	Capacity	Readability	Pan Size
<b>MUW 300L</b>	300kg	0.05kg	375x375mm



## APPLICATIONS

- Weighing

## WEIGHT AND DIMENSIONS

- Net Weight - 21.7kg, Overall Dim. - 375x600x2320mm (wxdxh)

## ACCESSORIES

Item number	Description
1120011156	ATP thermal printer
3126011263	ATP thermal printer paper
3126011281	ATP thermal printer paper (pack of 10)
3014011014	RS-232 cable
3074010507	RS-232 to USB adapter (must order corresponding RS-232 cable)
600002028	Adam DU data collection program
700660290	Calibration certificate



## FEATURES

- Bright LED display for easy viewing in most environments
- Colour-coded keys facilitate quick recognition of the most frequently used buttons
- Splash-proof housing, keypad and display mean easy cleaning and peace of mind
- Footrests and armrests pivot for easy patient accessibility
- Wheels swivel, allowing easy movement
- BMI (body mass index) indicator
- Zero-tracking feature ensures display returns to zero reading
- Rechargeable battery included for operation almost anywhere
- AC adapter included

## Convenience and accessibility when weighing patients with limited mobility

### GENERAL SPECIFICATIONS

- Weighing units: kg, lb
- Interface: RS-232
- Power Supply: 15VDC 50/60Hz 500mA adapter / Internal rechargeable battery
- Display: LED with 22mm-high digits
- Calibration: External calibration
- Operating Temperature: 5° to 40°C

Model	Capacity	Readability
MCW 300L	300kg	0.05kg



### APPLICATIONS

- Weighing

### WEIGHT AND DIMENSIONS

- Net Weight - 25kg, Overall Dim. - 675x875x950mm (wxdxh)

### ACCESSORIES

Item number	Description
1120011156	ATP thermal printer
3126011263	ATP thermal printer paper
3126011281	ATP thermal printer paper (pack of 10)
3014011014	RS-232 cable
3074010507	RS-232 to USB adapter (must order corresponding RS-232 cable)
600002028	Adam DU data collection program
700660290	Calibration certificate





## Individual stainless steel weights

Part Number	Model	Class
700100232	E2 50g Calibration Weight	OIML E2
700100022	E2 100g Calibration Weight	OIML E2
700100023	E2 200g Calibration Weight	OIML E2
700100019	F1 1g Calibration Weight	OIML F1
700100018	F1 2g Calibration Weight	OIML F1
700100017	F1 5g Calibration Weight	OIML F1
700100016	F1 10g Calibration Weight	OIML F1
700100015	F1 20g Calibration Weight	OIML F1
700100014	F1 50g Calibration Weight	OIML F1
700100007	F1 100g Calibration Weight	OIML F1
700100012	F1 200g Calibration Weight	OIML F1
700100008	F1 500g Calibration Weight	OIML F1
700100009	F1 1kg Calibration Weight	OIML F1
700100010	F1 2kg Calibration Weight	OIML F1
700100013	F1 5kg Calibration Weight	OIML F1
700100065	M1 1g Calibration Weight	OIML M1
700100066	M1 2g Calibration Weight	OIML M1
700100067	M1 5g Calibration Weight	OIML M1
700100068	M1 10g Calibration Weight	OIML M1
700100069	M1 20g Calibration Weight	OIML M1
700100058	M1 50g Calibration Weight	OIML M1
700100059	M1 100g Calibration Weight	OIML M1
700100072	M1 200g Calibration Weight	OIML M1
700100060	M1 500g Calibration Weight	OIML M1
700100029	M1 1kg Calibration Weight	OIML M1
700100030	M1 2kg Calibration Weight	OIML M1



Cast Iron Weight



Stainless steel weight sets

The OIML weights are individual stainless steel masses that can be used to test to the OIML standard. E2 weights offer the highest accuracy ideal for Analytical balances, followed by F1 weights which are suitable for precision balances. M1 weights are ideal for compact and bench scales that require less accuracy. OIML weight sets are a complete set of test weight that can meet the requirements for testing to OIML standards. E2 weights offer the highest accuracy ideal for analytical, F1 weights are geared towards precision balances, M1 weights offer the lowest accuracy but are more affordable and are ideal for lower cost items such as compact balances and bench scales. Cast iron weights are available in OIML M1 class, they offer higher capacities to meet the needs to calibrate larger scales.

## Stainless steel weight sets

Part Number	Model	Class
700100207	E2 1mg - 200g Calibration Weight Set	OIML E2
700100027	E2 1g - 200g Calibration Weight Set	OIML F1
700100049	F1 1mg - 200g Calibration Weight Set	OIML F1
700100042	F1 1mg - 500g Calibration Weight Set	OIML F1
700100070	F1 1g - 100g Calibration Weight Set	OIML F1
700100035	F1 1g - 200g Calibration Weight Set	OIML M1
700100071	F1 1g - 500g Calibration Weight Set	OIML M1
700100070	F1 1g - 2kg Calibration Weight Set	OIML F1
700100035	M1 1g - 100g Calibration Weight Set	OIML M1
700100037	M1 1g - 200g Calibration Weight Set	OIML M1
700100228	M1 1g - 500g Calibration Weight Set	OIML M1
700100071	M1 1g - 2kg Calibration Weight Set	OIML M1

## Cast iron weights

Part Number	Model	Class
700100024	M1 5kg Calibration Weight	OIML M1
700100031	M1 10kg Calibration Weight	OIML M1
700100032	M1 20kg Calibration Weight	OIML M1

## Calibration certificates for weights and weight sets

**OIML weight class E2**  
Calibration Certificate

**OIML weight class F1**  
Calibration Certificate

**OIML stainless steel weight class M1**  
Calibration Certificate

**OIML weight set class E2**  
Calibration Certificate for E2 1g - 200g weight set  
Calibration Certificate for E2 1mg - 200g weight set

**OIML weight set class F1**  
Calibration Certificate for F1 1g - 100g weight set  
Calibration Certificate for F1 1g - 200g weight set  
Calibration Certificate for F1 1g - 500g weight set  
Calibration Certificate for F1 1g - 2kg weight set  
Calibration Certificate for F1 1mg - 200g weight set  
Calibration Certificate for F1 1mg - 500g weight set

**OIML stainless steel weight set class M1**  
Calibration Certificate for M1 1g - 100g weight set  
Calibration Certificate for M1 1g - 200g weight set  
Calibration Certificate for M1 1g - 500g weight set  
Calibration Certificate for M1 1g - 2kg weight set

## AdamDU - Data Collection Software



### Practical Functionality – Smart Features

- Monitor and collect data readings for up to 8 balances or scales simultaneously.
- Record custom data or notations along with readings using up to 6 user-defined fields.
- Log calibration reports to file for maintaining complete calibration records.
- Collect date and time with readings.
- Collect balance serial number with readings for unique identification. (Feature may not be available with all balances and scale).
- Configure AdamDU to remember individual session settings and file names.

### Statistics and Graphing

- View statistics including Min, Max, Median, Mean, Variance, and Standard Deviation.
- Graph readings in real time. Print results and graphs from within the AdamDU application.
- Quickly search for a specific reading, min, or max readings

### Easy Data Management

- Dynamically export readings in several file formats (text, CSV, HTML, XML) for importing to other systems or applications.
- Export captured readings automatically to Microsoft® Excel<sup>1</sup> or Microsoft® Word<sup>1</sup> for further analysis or reporting.
- Export captured readings to Windows® Clipboard for quick pasting in Windows® applications.



The Commander window lets you view data for up to 8 balances or scales on one screen for an overview of the active data sessions.

<sup>1</sup>You need a licensed copy of Microsoft® Word and Microsoft® Excel to use this facility. Microsoft Word, Microsoft Excel, Microsoft and Windows is a registered trademark of Microsoft Corporation in the United States and other countries.



Six user-defined fields are available for custom data entry with each reading. Custom data can be exported with the weighing data.



Real time graphing and statistics are easily viewable in the data grid. Balance control buttons let you request data or tare the balance right from the software.

## Anti-Vibration Table



General Specifications	
Overall dimensions (wxdxh)	800mm x 600mm x 782mm
Work surface dimensions	400mm x 450mm
Weight of work surface	49kg
Total Weight	77kg

### Features

- Scratch resistant marble slab
- Two table construction keeps the marble block in the middle and reduces interference
- Large working surface of 400mm x 450mm
- Working surface around the vibration slab for resting samples
- Adjustable levelling feet for uneven surfaces

# Hard Carry Cases



CPWplus



CBK / CBC / AZextra



HCB & CQT

## General Specifications

Carry Case Model	CPWplus	CBK/CBC/AZextra	HCB & CQT
Overall dimensions (wxdxh)	480mm x 390mm x 150mm	472mm x 445mm x 190mm	483mm x 362mm x 152mm

## Features

- Light weight and scratch resistant outside
- Foam padded interior for a snug fit
- Rugged construction keeps the scale safe
- Key lock latches for security
- Non-slip rubber feet

# DDK Density Determination Kits - for Eclipse and Nimbus 0.1mg and 1mg models only



The density determination kit consists of apparatus which allows the user to weigh a sample in air and then weigh the sample in water or another liquid with a known density. The Adam DDK Kit allows for densities to be determined for solid and liquid samples.

The software in the balance takes the operator through the process and finally displays the resultant density on the LCD in  $\text{g/cm}^3$ , compensating for temperature and for the use of alternative liquids when calculating the density of solids or liquids.

## The Kits Consist Of:

- Glass beaker
- Suspended weighing cradle to replace the standard pan
- Independent support for the beaker
- Thermometer with clip
- Glass sinker of known volume for the determination of liquid density

# ATP Thermal Printer

## Technical Specifications

Model	ATP Thermal Printer
Power Supply	External power adapter 110/220 VAC - 8.5 VDC OUT
Baud Rates	Selectable from 2400 to 115200
Data Bits	8
Parity	None
Operating Temperature	0°C to + 45°C
Housing	ABS plastic housing
Overall Dimensions (WxDxH)	4.5" x 7.2" x 3.5" / 114mm x 184mm x 90mm
Net Weight	1.7lb / 0.76kg with paper roll installed



## Features

- Interface capabilities: serial port
- Support for up to 26 international character sets
- Print size 24 x 24 dot
- Column size 384 dots per line
- Print speed 50mm / sec
- 57.5mm paper width
- Selectable baud rates
- LED indicators to show power,error and when out of paper

## Accessories

- No. 3126011263 Thermal paper
- No. 3126011281 Thermal paper (10pk)

# PMB Temperature Calibration kit



Cushioned Carry Case




## Technical Specifications

Model	PMB Temperature Calibration Kit
Power Supply	Battery - 1.5v DC
Display Value	0.1°C
Operating Temperature	-50°C to 300°C

# PMB Moisture Sample Pans



Available in packs of 250

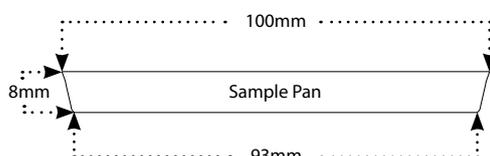

## Technical Specifications

Model	PMB Sample Pans
Pan Size	100mm ø Top - 100mm - wide Depth - 8mm - height Bottom - 93mm - wide
Pan Material	Aluminium

[www.adamequipment.co.uk](http://www.adamequipment.co.uk)

**Adam Equipment Co. Ltd.**

Maidstone Road,  
Kingston,  
Milton Keynes,  
MK10 0BD  
United Kingdom

**Phone: +44 (0)1908 274545**

**Fax: +44 (0)1908 641339**

**E-mail: [sales@adamequipment.co.uk](mailto:sales@adamequipment.co.uk)**

**©Adam Equipment. All rights reserved.**

UK-5264

Adam Equipment follows a policy of continuous improvement and reserves the right to change specification and pricing without notice.  
Adam Equipment's standard terms and conditions of sale apply. Errors and omissions excepted.